


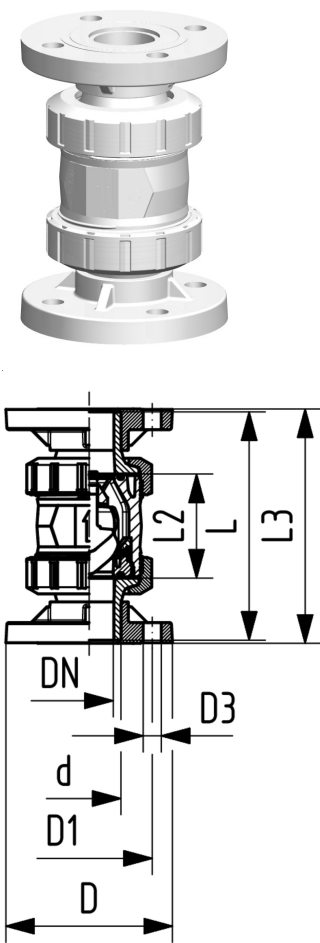

SYGEF标准型
562型锥形止回阀
带固定法兰 公制

型号:

- 材质：PVDF
- 适用于垂直或水平安装
- 最低密封背压1m水柱
- 弹簧预载，弹簧材质不锈钢(1.4310)
- 弹簧可用其他材料代替，见备件
- 安装简单，易拆卸
- 即使在高流速下也无振动
- 锥形球面，优化流体形态，双导向
- 紧凑型安装长度，与546型球阀相同
- 安装长度符合EN558-1标准
- Z尺寸，阀端和阀门螺帽与360型不兼容
- 连接尺寸：ISO7005 PN10，EN1092 PN10，DIN2501 PN10

注意：请确保避免由于焊缝导致的直径缩小(湍流)

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	FKM code	SP	weight (kg)
20	15	16	180	175 562 192	1	0,420
25	20	16	380	175 562 193	1	0,700
32	25	16	460	175 562 194	1	0,860
40	32	16	850	175 562 195	1	1,430
50	40	16	1080	175 562 196	1	1,940
63	50	16	1670	175 562 197	1	3,160

d (mm)	D (mm)	D1 (mm)	D3 (mm)	L (mm)	L2 (mm)	L3 (mm)	Inch (inch)
20	93	65	14	120	56	130	1/2
25	103	75	14	140	65	150	3/4
32	115	85	14	150	71	160	1
40	137	100	18	170	85	180	1 1/4
50	147	110	18	190	89	200	1 1/2
63	162	125	18	220	101	230	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail:
info.ps@georgfischer.comInternet: <http://www.gfps.com>