
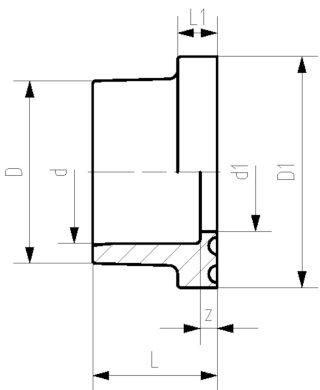
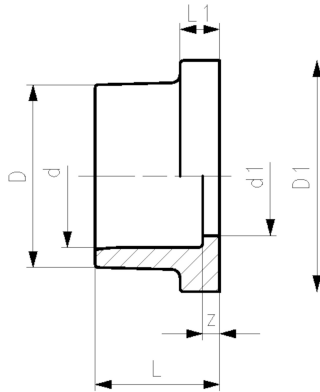




Flange adaptor PVC-U Combined jointing face flat and serrated metric / BS

Model:

- Solvent cement socket metric
- d16 - d50: Sealing surface flat
- d63 - d400: combined jointing face flat and serrated
- Combination with gasket: profile flange gasket EPDM code no. 748 440 705-725, FKM code no. 749 440 705-725 or flat gasket EPDM code no. 748 440 705-725, only use O-ring EPDM code no. 748 410 000-174, FKM code no. 749 410 000-174 in combination with counterpart flange adaptor code no. 721 810 105-123
- Gasket: flat gasket EPDM code no. 748 400 306-323
- Combination with flanges (metric & ANSI): PVC-U, PP-V, PP-Steel

Note:

* bevel on pipe may be needed if used with butterfly valve type 037/038/039

The flat gasket affects the maximum allowable operating pressure!

d	d	DN	PN	Code	SP	Weight	D	D1	d1	L	L1	z
(mm)	(inch)	(mm)	(bar)			(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
16		10	16	721 800 105	10	0.006	22	29	13	17	6	3
* 20	½	15	16	721 800 106	10	0.009	27	34	16	19	6	3
	½	15	15	721 791 106	10	0.009	27	34	16	21	6	3
* 25	¾	20	16	721 800 107	10	0.015	33	41	21	22	7	3
	¾	20	15	721 791 107	10	0.014	33	41	21	24	7	3
* 32	1	25	16	721 800 108	10	0.024	41	50	28	25	7	3
	1	25	15	721 791 108	10	0.023	41	50	28	27	7	3
* 40	1 ¼	32	16	721 800 109	10	0.039	50	61	36	29	8	3
	1 ¼	32	15	721 791 109	10	0.035	50	61	36	32	8	3
* 50	1 ½	40	16	721 800 110	10	0.056	61	73	45	34	8	3
	1 ½	40	15	721 791 110	10	0.058	61	73	45	33	8	3
* 63	2	50	16	721 790 111	10	0.103	77	90	57	41	9	3
	2	50	15	721 791 111	5	0.107	77	91	56	40	9	3
* 75	2 ½	65	16	721 790 112	10	0.159	91	106	69	47	10	3
* 90	3	80	16	721 790 113	10	0.253	108	125	82	56	11	5
	3	80	15	721 791 113	20	0.269	108	125	82	56	11	5
110		100	16	721 790 114	10	0.417	131	150	102	66	12	5
* 125	4	125	16	721 790 115	5	0.533	148	170	117	74	13	5
	4	100	15	721 791 115	10	0.422	136	155	108	69	12	5
* 140	5	125	16	721 790 116	6	0.725	165	188	132	81	14	5
* 160	6	150	16	721 790 117	2	1.093	188	213	152	91	16	5
	6	150	15	721 791 117	2	1.172	198	217	160	96	16	5
* 200		200	10	721 790 119	2	1.460	224	250	192	112	24	6
* 225	8	200	10	721 790 120	2	1.743	248	274	217	125	25	6
	8	200	9	721 791 120	2	2.028	248	274	210	122	20	6
* 250		250	10	721 790 121	1	2.203	274	303	240	140	23	9
* 280	10	250	10	721 790 122	1	2.930	308	329	270	151	23	5
	10	250	9	721 791 122	1	3.020	307	329	260	151	23	9
* 315		300	6	721 790 123	1	4.455	346	379	302	172	27	8
355		350	6	721 790 124	1	5.963	384	430	341	194	32	10
	12	300	6	721 791 123	1	3.400	346	379	302	172	27	4
400		400	6	721 790 125	1	9.041	438	482	384	216	34	10

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.