
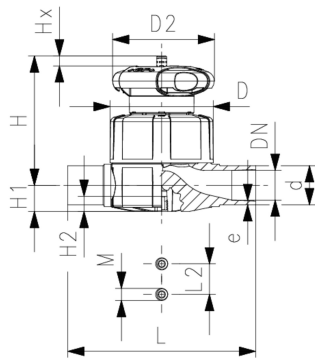




Type 515 Diaphragm Valve PROGEF Standard PP Butt fusion spigots SDR11 metric

Model:

- Material: PP-H
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Handwheel with built-in locking mechanism
- Overall length EN 558

Option:

- Individual configuration of the valve
- Self adjusting multifunctional module with integrated limit switches

* O-Ring material: FKM

d (mm)	DN (mm)	Size (inch)	PN (bar)	Cv-value (l/min)	NBR Code	EPDM Code	GP
20	15	½	10	125	167 515 102	167 515 112	
25	20	¾	10	271	167 515 103	167 515 113	
32	25	1	10	481	167 515 104	167 515 114	
40	32	1 ¼	10	759	167 515 105	167 515 115	
50	40	1 ½	10	1263	167 515 106	167 515 116	
63	50	2	10	1728	167 515 107	167 515 117	

d (mm)	PTFE/EPDM Code	FKM Code	SP	weight (kg)
20	167 515 132	167 515 162	1	0.297
25	167 515 133	167 515 163	1	0.381
32	167 515 134	167 515 164	1	0.948
40	167 515 135	167 515 165	1	1.104
50	167 515 136	167 515 166	1	2.052
63	167 515 137	167 515 167	1	2.601

d (mm)	D (mm)	D2 (mm)	H (mm)	H1 (mm)	H2 (mm)	L (mm)	L2 (mm)	M	e (mm)	Lift = Hx (mm)	closest inch (inch)
20	65	65	73	14	12	124	25	M6	1.9	7	½
25	80	65	81	18	12	144	25	M6	2.3	10	¾
32	88	87	107	22	12	155	25	M6	2.9	13	1
40	101	87	115	26	15	176	45	M8	3.7	15	1 ¼
50	117	135	148	32	15	193	45	M8	4.6	19	1 ½
63	144	135	166	39	15	223	45	M8	5.8	25	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>