




Robinet cu bila tip 546 PVC-U Cu flanșe fixe din PVC-U

Model:

- Lockable as a standard (DN10-50)
- Integrated stainless steel mounting inserts
- Z-dimension, valve end and union nut **are compatible** with type 546 (1st Generation)
- Pentru instalare si demontare usoara
- Etansare bila PTFE
- Overall length according to EN 558 (basic series: row 1)
- Dimensiunea de conectare : ISO 7005 PN10, EN 1092 PN10, DIN 2501 PN10

Option:

- Individual configuration of the valve possible
- Actionare pneumatica sau electrica de la +GF+
- Interface-module with position feedback sensor, incl. LED feedback (DN10-50)
- Manual spring return lever ("Dead man") (DN10-25)
- Multifunctional module with integrated limit switches (DN65-100)

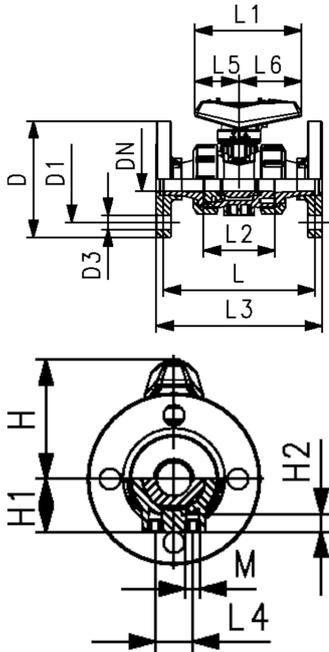

d (mm)	DN (mm)	PN (bar)	Valoare kv ($\Delta p=1$ bar) (l/min)	EPDM Cod	SP	Greutate (kg)	FKM Cod	SP	Greutate (kg)
20	15	16	185	800 000 182	1	0,370	800 042 709	1	0,420
25	20	16	350	800 026 579	1	0,520	800 000 193	1	0,510
32	25	16	700	800 011 080	1	0,730	800 011 076	1	0,731
40	32	16	1000	800 011 174	1	1,245	800 000 195	1	1,230
50	40	16	1600	800 011 171	1	1,617	800 042 713	1	1,640
63	50	16	3100	800 011 039	1	2,656	800 011 040	1	2,710

d (mm)	D (mm)	D1 (mm)	D3 (mm)	H (mm)	H1 (mm)	L3 (mm)	L1 (mm)	L2 (mm)	L (mm)	L4 (mm)	L5 (mm)	L6 (mm)	closest inch (inch)
20	95	65	14	57	27	130	77	56	124	25	32	45	½
25	105	75	14	67	30	150	97	65	144	25	39	58	¾
32	115	85	14	73	36	160	97	71	154	25	39	58	1
40	140	100	18	90	44	180	128	85	174	45	54	74	1 ¼
50	150	110	18	97	51	200	128	89	194	45	54	74	1 ½
63	165	125	18	116	64	230	152	101	224	45	66	87	2

Datele tehnice nu sunt obligatorii. Acestea nu constituie garantia caracteristicilor, a proprietatilor sau a durabilitatii. Acestea sunt supuse modificarii. Se aplica Condiitiile noastre Generale de Vanzare.

Georg Fischer GmbH Albershausen SA Sucursala Bucuresti, Tel. +40 31 104 0492, Internet: www.gfps.com/ro