
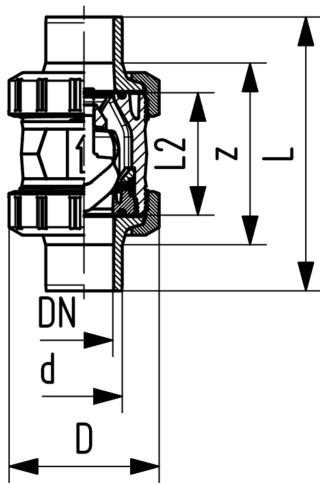


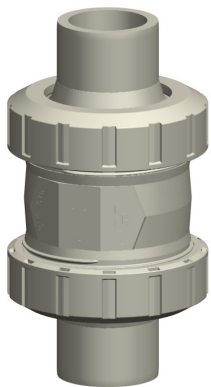

PROGEF Standard Check valve type 562
With butt fusion spigots IR-Plus
SDR11 metric
oilfree

Model:

- Material: PP-H
- For horizontal or vertical installation
- Sealing at a minimum water column of 1m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimised return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

d	DN	PN	kv-value	SDR	EPDM	SP	Weight	FKM	SP	Weight
(mm)	(mm)	(bar)	($\Delta p=1$ bar)		Code		(kg)	Code		(kg)
			(l/min)							
20	15	10	180	11	800 055 222	1	0.090	800 055 225	1	0.090
25	20	10	380		800 056 145	1	0.190	800 065 500	1	0.190
32	25	10	460		800 056 151	1	0.220	800 065 501	1	0.220
40	32	10	850		800 065 504	1	0.380	800 065 502	1	0.380
50	40	10	1080	11	800 055 223	1	0.560	800 055 226	1	0.560
63	50	10	1670	11	800 055 224	1	0.990	800 055 227	1	0.990

d	D	L	L2	e	closest
(mm)	(mm)	(mm)	(mm)	(mm)	inch
					(inch)
20	50	130	56	1.9	½
25	58	143	65	2.3	¾
32	68	150	71	2.9	1
40	84	171	85	3.7	1 ¼
50	97	191	89	4.6	1 ½
63	124	220	101	5.8	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>