



Servomoteur électrique smart type dEA25/45/120/250

Exécution:

- Connectivité via NFC et Wi-Fi Direct assurant contrôle, identification et visibilité sans ouvrir le boîtier
- Données les plus pertinentes visualisées dans l'application
- Connexion et contrôle via l'application possible
- LED stripe for visual open/close 360° feedback
- Chauffage intégré, indicateur de position (ouvert/fermé/intermédiaire)
- Tous : Chauffage réglable et LED d'erreur à 7 segments inclus
- EA25 - 250: commande ouverture / fermeture / milieu; Retour de position ouvert / fermé / central prêt à fonctionner
- Classe IP68

Option:


- Tous : unité de retour à sécurité intégrée

*Avec adaptateur 198 000 587 F05 / SW 11, 198 204 057 F05 / SW 14

Servo-moteur	Tension	Torque nominal (N/m)	Torque maximal (N/m)	Interfaces
dEA25	100 -230V AC	10	25	F05 (SW 11/14)*
dEA25	24V AC/DC	10	25	F05 (SW 11/14)*
dEA45	100 -230V AC	20	45	F05 (SW 11/14)*
dEA45	24V AC/DC	20	45	F05 (SW 11/14)*
dEA120	100 -230V AC	60	120	F07 (SW17)
dEA120	24V AC/DC	60	120	F07 (SW17)
dEA250	100 -230V AC	100	250	F07 (SW22)
dEA250	24V AC/DC	100	250	F07 (SW22)

Servo-moteur	Code	CAN
dEA25	198 153 192	
dEA25	198 153 193	
dEA45	198 153 194	
dEA45	198 153 195	
dEA120	198 153 196	
dEA120	198 153 197	
dEA250	198 153 198	
dEA250	198 153 199	

Servo-moteur	H1 (mm)	H2 (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	L7 (mm)	L8 (mm)	L9 (mm)
dEA25	167	188	150	82.5	107	64.3	122	16	49	33	33
dEA25	167	188	150	82.5	107	64.3	122	16	49	33	33
dEA45	167	188	150	82.5	107	64.3	122	16	49	33	33
dEA45	167	188	150	82.5	107	64.3	122	16	49	33	33
dEA120	190	212	150	82.5	107	64.3	122	16	49	33	33
dEA120	190	212	150	82.5	107	64.3	122	16	49	33	33
dEA250	200	221	150	82.5	107	64.3	122	16	49	33	33
dEA250	200	221	150	82.5	107	64.3	122	16	49	33	33

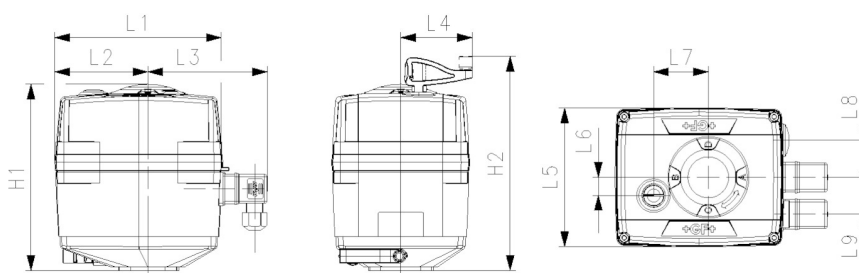

Data sheet

valid from: 24/01/2025



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>