
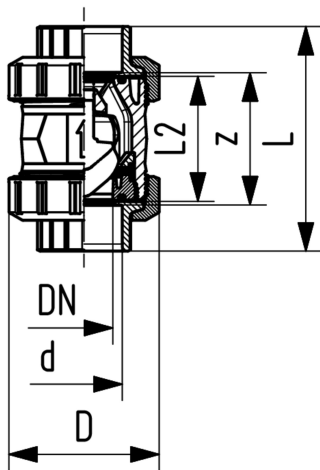




## Check valve type 562 PVC-C SF With solvent cement sockets metric

### Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1m
- Silicone free / paint-compatible
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimised return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

| d<br>(mm) | DN<br>(mm) | PN<br>(bar) | kv-value<br>( $\Delta p=1$ bar)<br>(l/min) | EPDM<br>Code | SP | Weight<br>(kg) | FKM<br>Code | SP | Weight<br>(kg) |
|-----------|------------|-------------|--------------------------------------------|--------------|----|----------------|-------------|----|----------------|
| 16        | 10         | 16          | 190                                        | 163 562 201  | 1  | 0.120          | 163 562 211 | 1  | 0.120          |
| 20        | 15         | 16          | 180                                        | 163 562 202  | 1  | 0.120          | 163 562 212 | 1  | 0.120          |
| 25        | 20         | 16          | 380                                        | 163 562 203  | 1  | 0.260          | 163 562 213 | 1  | 0.280          |
| 32        | 25         | 16          | 460                                        | 163 562 204  | 1  | 0.280          | 163 562 214 | 1  | 0.280          |
| 40        | 32         | 16          | 850                                        | 163 562 205  | 1  | 0.490          | 163 562 215 | 1  | 0.490          |
| 50        | 40         | 16          | 1080                                       | 163 562 206  | 1  | 0.710          | 163 562 216 | 1  | 0.710          |
| 63        | 50         | 16          | 1670                                       | 163 562 207  | 1  | 1.460          | 163 562 217 | 1  | 1.470          |
| 75        | 65         | 16          | 2950                                       | 163 562 208  | 1  | 3.460          | 163 562 218 | 1  | 3.480          |
| 90        | 80         | 16          | 3600                                       | 163 562 209  | 1  | 5.540          | 163 562 219 | 1  | 5.570          |
| 110       | 100        | 16          | 4150                                       | 163 562 210  | 1  | 8.930          | 163 562 220 | 1  | 8.970          |

| d<br>(mm) | D<br>(mm) | L<br>(mm) | L2<br>(mm) | z<br>(mm) | closest<br>inch<br>(inch) |
|-----------|-----------|-----------|------------|-----------|---------------------------|
| 16        | 50        | 92        | 56         | 64        | $\frac{3}{8}$             |
| 20        | 50        | 95        | 56         | 64        | $\frac{1}{2}$             |
| 25        | 58        | 110       | 65         | 72        | $\frac{3}{4}$             |
| 32        | 68        | 123       | 71         | 79        | 1                         |
| 40        | 84        | 146       | 85         | 94        | 1 $\frac{1}{4}$           |
| 50        | 97        | 157       | 89         | 95        | 1 $\frac{1}{2}$           |
| 63        | 124       | 183       | 101        | 107       | 2                         |
| 75        | 166       | 233       | 136        | 144       | 2 $\frac{1}{2}$           |
| 90        | 200       | 254       | 141        | 151       | 3                         |
| 110       | 238       | 301       | 164        | 174       | 4                         |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:  
info.ps@georgfischer.com Internet: <http://www.gfps.com>