





3-Way ball valve type 543 Pro PVC-U
Horizontal/L-port 100-230V
With manual emergency override
With solvent cement spigots metric
With electric actuator EA15

Model:

- Voltage 100-230V, 50-60Hz
- Factory set control range 90°<
- Basic position A-C opened, activated position B-C opened, see flow scheme
- Other positions possible by adjusting the limit switches
- Heating element, position feedback (Open/Close)
- Integrated stainless steel mounting inserts

Option:



- Optional accessories: Fail-safe return unit, Monitoring board, Position controller, Profibus DP board

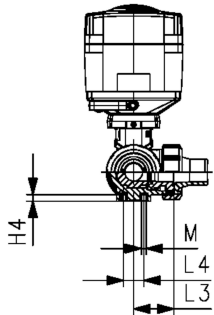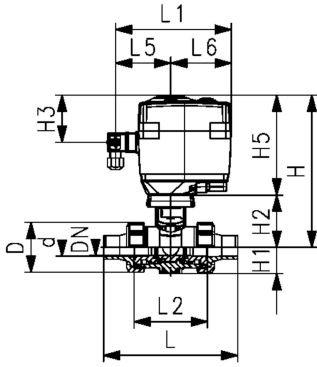

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value (Δp=1 bar) (l/min)	EA	EPDM Code	Weight (kg)	FKM Code	Weight (kg)
16	10	3/8	10	50	EA15	199 197 002	2.128	199 197 012	2.128
20	15	1/2	10	75	EA15	199 197 003	2.137	199 197 013	2.137
25	20	3/4	10	150	EA15	199 197 004	2.271	199 197 014	2.271
32	25	1	10	280	EA15	199 197 005	2.470	199 197 015	2.470
40	32	1 1/4	10	480	EA15	199 197 006	2.891	199 197 016	2.891
50	40	1 1/2	10	620	EA15	199 197 007	3.749	199 197 017	3.385
63	50	2	10	1230	EA15	199 197 008	4.809	199 197 018	4.809

d (mm)	D (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H5 (mm)	H6 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	L7 (mm)
16	50	231	28	64	94	167	8	131	180	194	36	25	97	83	122
20	50	231	28	64	94	167	8	141	180	194	36	25	97	83	122
25	58	240	32	73	94	167	8	165	180	194	43	25	97	83	122
32	68	240	36	73	94	167	8	182	180	194	50	25	97	83	122
40	84	251	45	84	94	167	9	209	180	194	60	45	97	83	122
50	97	251	51	84	94	167	9	242	180	194	69	45	97	83	122
63	124	273	65	106	94	167	9	302	180	194	89	45	97	83	122

d (mm)	L8 (mm)	M	closest inch (inch)
16	33	6	3/8
20	33	6	1/2
25	33	6	3/4
32	33	6	1
40	33	8	1 1/4
50	33	8	1 1/2
63	33	8	2

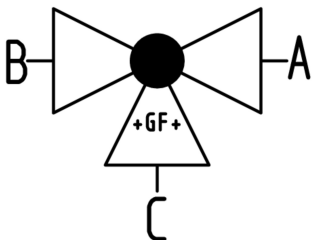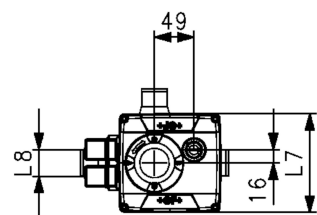

Data sheet

valid from: 3/25/25



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>