
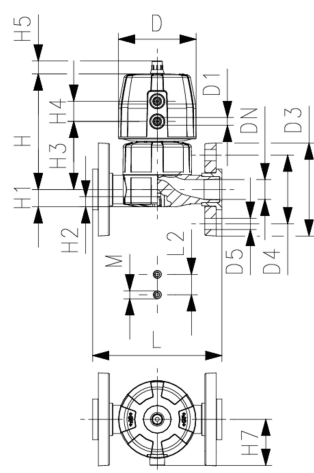


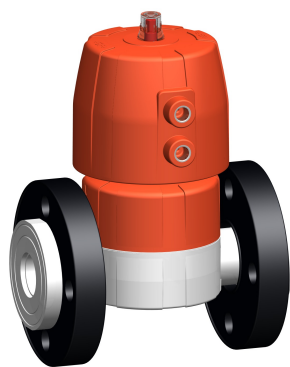

SYGEF 标准型
气动隔膜阀 DIASTAR 10
常开 (FO)
带PP-V支撑法兰 美标

型号:

- 材质：PVDF
- 相对于以往产品双倍流速
- 用一个压紧螺帽代替原先的四个螺栓
- 气路连接可以旋转90度
- 平/细齿连接面
- 总长度符合EN 558
- 连接尺寸：ANSI/ASME B 16.5 class 150, ASTM D 4024, BS 1560, BS EN 1759

选项:

- 可提供其他阀门配置
- 提供多种附件

工作压力：单边

* O型圈材质:FKM

Size (inch)	DN (mm)	kv-value ($\Delta p=1$ bar) (l/min)	PTFE/ EPDM code	SP	weight (kg)	PTFE/FKM code	SP	weight (kg)
1/2	15	125	185 647 732	1	0,820	185 647 752	1	0,820
3/4	20	271	185 647 733	1	1,299	185 647 753	1	1,299
1	25	481	185 647 734	1	1,611	185 647 754	1	1,611
1 1/4	32	759	185 647 735	1	2,494	185 647 755	1	2,494
1 1/2	40	1263	185 647 736	1	4,391	185 647 756	1	4,391
2	50	1728	185 647 737	1	5,672	185 647 757	1	5,672

Size	D	D1_G	D3	D4	D5	H	H1	H2	H3	H4	H5	H7	L	L2	M
(inch)	(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
1/2	68	1/8	95	60	16	101	14	12	60	24	16	57	130	25	M6
3/4	96	1/8	105	70	16	132	18	12	73	25	16	57	150	25	M6
1	96	1/8	115	79	16	143	22	12	84	25	16	69	160	25	M6
1 1/4	120	1/8	140	89	16	173	26	15	99	26	26	88	180	45	M8
1 1/2	150	1/4	150	98	16	214	32	15	119	36	26	103	200	45	M8
2	150	1/4	165	121	19	226	39	15	132	36	26	103	230	45	M8

Size (inch)	Lift = Hx (mm)
1/2	7
3/4	10
1	13
1 1/4	15
1 1/2	19
2	23

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>