

**PROGEF Standard Diaphragm valve DIASTAR Ten
DA (Double acting)
With backing flanges PP-V Inch ANSI**

Model:


- Material: PP-H
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals
- Joining faces flat/serrated
- Connecting dimension: ANSI/ASME B 16.5 class 150, ASTM D 4024, BS 1560, BS EN 1759

Option:

- Individual configuration of the valve
- Comprehensive range of accessories available

* PN: PTFE

Working Pressure: **one side**

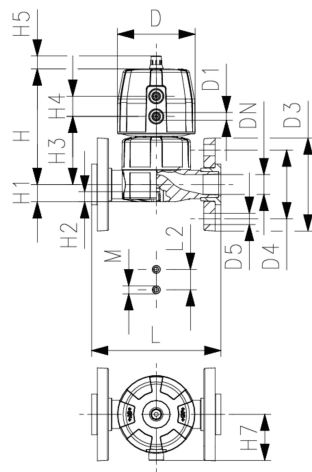

d (mm)	DN (mm)	Size (inch)	PN (bar)	PN* (bar)	kv-value (Δp=1 bar) (l/min)	EPDM Code	Weight (kg)	PTFE/EPDM Code	Weight (kg)
20	15	½	10	10*	125	167 657 712	0.608	167 657 732	0.618
25	20	¾	10	10*	271	167 657 713	1.013	800 063 749	1.760
32	25	1	10	10*	481	167 657 714	1.272	800 063 748	2.610
40	32	1 ¼	10	10*	759	167 657 715	2.009	800 063 750	3.760
50	40	1 ½	10	10*	1263	167 657 716	3.049	167 657 736	3.079
63	50	2	10	10*	1728	167 657 717	4.002	167 657 737	4.030

D (mm)	D1_G (inch)	D3 (mm)	D4 (mm)	D5 (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	H7 (mm)	L (mm)	L2 (mm)	M
68	⅝	95	60	16	101	14	12	60	24	16	57	130	25	M6
96	⅝	105	70	16	132	18	12	73	25	16	57	150	25	M6
96	⅝	115	79	16	143	22	12	84	25	16	69	160	25	M6
120	⅝	140	89	16	173	26	15	99	26	26	88	180	45	M8
150	⅝	150	98	16	214	32	15	119	36	26	103	200	45	M8
150	⅝	165	121	19	226	39	15	132	36	26	103	230	45	M8

Lift =

Hx

(mm)

7

10

13

15

19

23

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>