


ABS Check valve type 562 With threaded sockets Rp

Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1 m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

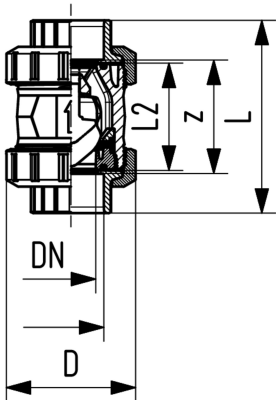

d	Rp	DN	PN	kv-value	EPDM	SP	Weight	D	L	L2	z
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	Code		(kg)	(mm)	(mm)	(mm)	(mm)
				(l/min)							
16	3/8	10	10	190	169 562 021	1	0.090	50	95	56	69
20	1/2	15	10	180	169 562 022	1	0.100	50	100	56	67
25	3/4	20	10	380	169 562 023	1	0.200	58	114	65	78
32	1	25	10	460	169 562 024	1	0.220	68	127	71	85
40	1 1/4	32	10	850	169 562 025	1	0.380	84	146	85	100
50	1 1/2	40	10	1080	169 562 026	1	0.580	97	152	89	106
63	2	50	10	1670	169 562 027	1	1.040	124	177	101	121

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>