


Check valve type 562
With solvent cement socket Inch ASTM
With Halar coated spring

Model:

- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

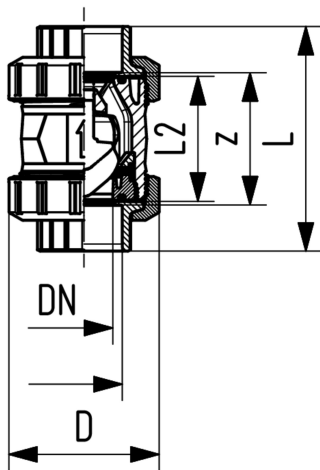

DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
10	3/8	16	190	800 070 485	1	0.130	800 070 486	1	0.130
20	1/2	16	180	800 054 647	1	0.130	800 058 405	1	0.130
25	3/4	16	380	800 053 919	1	0.250	800 065 033	1	0.250
32	1	16	460	800 052 424	1	0.320	800 056 445	1	0.320
40	1 1/4	16	850	800 054 654	1	0.530	800 070 487	1	0.530
50	1 1/2	16	1080	800 052 425	1	0.810	800 056 447	1	0.810
63	2	16	1670	800 052 426	1	1.530	800 052 295	1	1.530

D (mm)	L (mm)	L2 (mm)	z (mm)
50	105	56	67
50	105	56	61
58	121	65	70
68	133	71	76
84	154	85	90
97	164	89	94
124	183	101	107

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>