


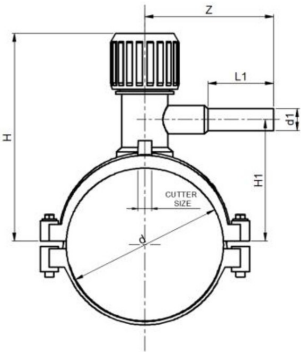

Monoline tapping saddle with bottom belt - Cutter Size – 25 mm

- **PE 100 SDR 11** (ISO S5)
- 10 bar Gas / 16 bar Water
- With an in-built cutter to tap live mains under pressure
- With integral pipe fixation
- Limited path fusion indicators
- Approvals -: DVGW /WRAS

d (mm)	d1 (mm)	SS304 Code	Weight (kg)	GP	Brass Code	H (mm)	H1 (mm)	L (mm)	L1 (mm)	Z (mm)
63	50	300 210 631	0.674	18	300 210 924	171	75	175	62	131
75	50	300 210 639	0.676	16	300 210 925	177	81	175	62	131
90	50	300 210 647	0.778	14	300 210 926	189	93	175	62	131
110	50	300 210 655	0.826	14	300 210 927	199	103	175	62	131
125	50	300 210 663	0.848	12	300 210 928	207	111	175	62	131
140	50	300 210 977	0.908	10	300 210 929	216	120	175	62	131
160	50	300 210 671	0.978	8	300 210 930	224	128	175	62	131
180	50	300 210 679	1.018	8	300 210 931	234	138	175	62	131
200	50	300 210 687	1.090	6	300 210 932	244	148	175	62	131
225	50	300 210 695	1.198	5	300 210 933	257	161	175	62	131

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>