
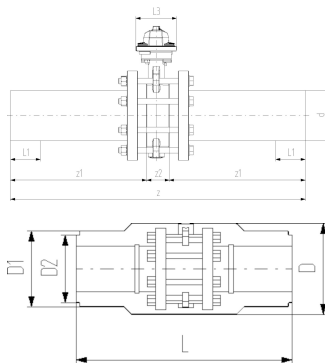




COOL-FIT PE Plus Butterfly valve Type 567 Wafer style with manual hand lever

Model:

- ABS with spigot PE100 **SDR11**, metric
- Including valve, flange adaptors, and insulation half shells
- Separate Fittings type A needed for joining

d (mm)	DN (mm)	PN	Cv-value (l/min)	EPDM Code	weight (kg)
110	100	10	6500	138 567 114	8.950
140	125	10	11500	138 567 116	15.751
160	150	10	16600	138 567 117	17.975
225	200	10	39600	138 567 120	28.316

d	D	D1	D2	L	L1	L2	L3	H	H1	H2	H3	z	z1	z2
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
110	310	188	168	556	72	255.0	106	325	104	167	55	696	320	56
140	280	233	222	670	84	252.5	58	369	119	180	70	830	383	64
160	358	259		720	90	255.0	115	401	143	203	55	895	412	72
225	409	325		776	110	408.0	149	465	170	210	85	996	462	73

d	closest inch
(mm)	(inch)
110	4
140	5
160	6
225	8

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>