




Check valve type 561 PVC-U
Without spring
With solvent cement sockets Inch ASTM
Inclusive 2 threaded valve ends NPT

Model:

- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

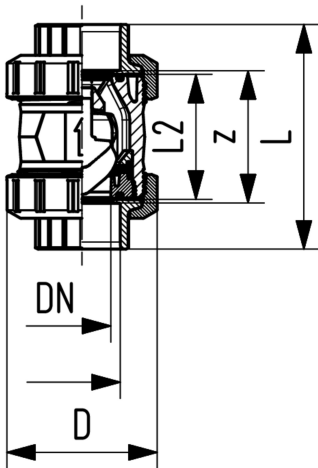

d (mm)	Thread Type	Size (inch)	EPDM Code	FKM Code
16	NPT	3/8	161 561 101	161 561 111
20	NPT	1/2	161 561 102	161 561 112
25	NPT	3/4	161 561 103	161 561 113
32	NPT	1	161 561 104	161 561 114
40	NPT	1 1/4	161 561 105	161 561 115
50	NPT	1 1/2	161 561 106	161 561 116
63	NPT	2	161 561 107	161 561 117
75	NPT	2 1/2	161 561 108	161 561 118
90	NPT	3	161 561 109	161 561 119
110	NPT	4	161 561 110	161 561 120

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>