




Pressure tapping valve With 360° rotatable outlet

- 10 bar Gas / 16 bar Water
- With integrated drill bit to tap live mains under pressure
- **Suitable for pipes with wall thickness between 7 and 25 mm only.**
- Complete with lower part and premounted PE100 coated valve piece
- The valve is closed clockwise
- Number of turns to fully open or close valve is 13 for outlet d32
- Number of turns to fully open or close valve is 29 for outlet d63
- Spindle size (SLW) 14
- 4mm pin connectors
- Limited path fusion indicators
- Long fusion outlet

Note:

*d355 and d400 are newly delivered with underpart

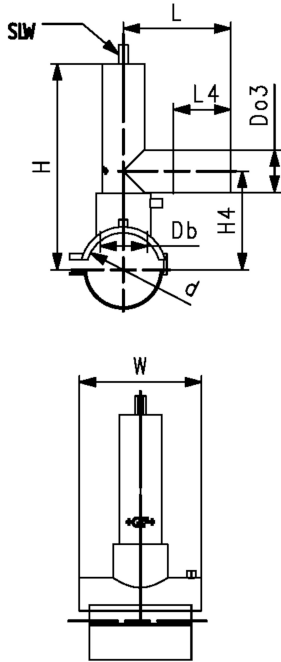

d	Do3	DN	PN	Code	Weight	
(mm)	(mm)	(mm)	(bar)		(kg)	
250	32	250	16	193 155 334	2.096	
280	32	250	16	193 155 345	1.835	
280	63	250	16	193 155 348	3.000	
315	32	300	16	193 155 358	3.000	
315	63	300	16	193 155 361	2.696	
*	355	32	350	16	193 155 364	3.000
*	355	63	350	16	193 155 367	2.696
*	400	32	400	16	193 155 375	3.000
*	400	63	400	16	193 155 378	3.000

d	L	L4	Db	W	H	H4	Suitable for
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
250	127	70	21	164	293	191	SDR Pipe 17-26
280	127	70	21	164	293	191	SDR Pipe 17-26
280	160	100	31	164	366	206	SDR Pipe 17-26
315	127	70	21	164	293	191	SDR Pipe 17-33
315	160	100	31	164	366	206	SDR Pipe 17-33
*	355	127	70	21	165	293	SDR Pipe 17-33
*	355	160	100	31	165	366	SDR Pipe 17-33
*	400	127	70	21	165	293	SDR Pipe 21-33
*	400	160	100	31	165	366	SDR Pipe 21-33

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>