


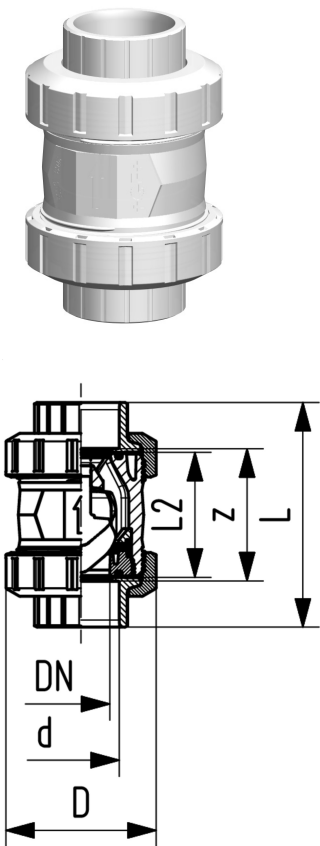

SYGEF标准型
562型锥形止回阀
带焊接承插端 公制

型号:

- 材质：PVDF
- 适用于垂直或水平安装
- 最低密封背压1m水柱
- 弹簧预载，弹簧材质不锈钢(1.4310)
- 弹簧可用其他材料代替，见备件
- 安装简单，易拆卸
- 即使在高流速下也无振动
- 锥形球面，优化流体形态，双导向
- 紧凑型安装长度，与546型球阀相同
- Z尺寸，阀端和阀门螺帽与360型不兼容

注意：请确保避免由于焊缝导致的直径缩小(湍流)

d	DN	PN	kv-value	FKM	weight	D	L	L2	z	Inch
(mm)	(mm)	(bar)	($\Delta p=1$ bar) (l/min)	code	(kg)	(mm)	(mm)	(mm)	(mm)	(inch)
16	10	16	190	175 562 011	0,160	50	93	56	67	³ / ₈
20	15	16	180	175 562 012	0,160	50	95	56	66	¹ / ₂
25	20	16	380	175 562 013	0,340	58	109	65	77	³ / ₄
32	25	16	460	175 562 014	0,360	68	119	71	83	1
40	32	16	850	175 562 015	0,670	84	135	85	99	1 ¹ / ₄
50	40	16	1080	175 562 016	0,990	97	147	89	105	1 ¹ / ₂
63	50	16	1670	175 562 017	1,770	124	168	101	117	2
75	65	16	2950	175 562 018	3,630	166	235	136	167	2 ¹ / ₂
90	80	16	3600	175 562 019	5,800	200	255	141	180	3
110	100	16	4150	175 562 020	9,450	238	305	164	215	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: <http://www.gfps.com>