



Variable area flow meter type 350
Float in PVDF with magnet
With solvent cement sockets PVC-U metric


Model:

- Standard guiding rod PVDF with stainless steel core (V4A) for DN50 and DN65

Option:

- 4-20 mA sensor
- Limit contacts
- Special scales for different media
- Union nuts and connecting parts in other materials on request

d (mm)	DN (mm)	Size (inch)	Scale range (l/h)	Taper tube in PVC-U transp. O- Rings in EPDM Code	Weight (kg)	Taper tube in Polyamid O-rings in EPDM Code	Weight (kg)
32	25	1	50 - 500	199 350 100	0.440	199 350 120	0.440
32	25	1	100 - 1000	199 350 101	0.479	199 350 121	0.440
40	32	1 ¼	150 - 1500	199 350 102	0.643	199 350 122	0.575
40	32	1 ¼	250 - 2500	199 350 103	0.619	199 350 123	0.620
50	40	1 ½	200 - 2000	199 350 104	0.900	199 350 124	0.900
50	40	1 ½	300 - 3000	199 350 105	0.970	199 350 125	0.900
50	40	1 ½	600 - 6000	199 350 106	0.925	199 350 126	0.900
63	50	2	600 - 6000	199 350 107	1.445	199 350 127	1.320
63	50	2	1000 - 10000	199 350 108	1.325	199 350 128	1.320
63	50	2	1500 - 15000	199 350 109	1.328	199 350 129	1.320
75	65	2 ½	2000 - 20000	199 350 110	2.150	199 350 130	2.150
75	65	2 ½	3000 - 30000	199 350 111	2.150	199 350 131	2.150
75	65	2 ½	8000 - 60000	199 350 112	2.150	199 350 132	2.150

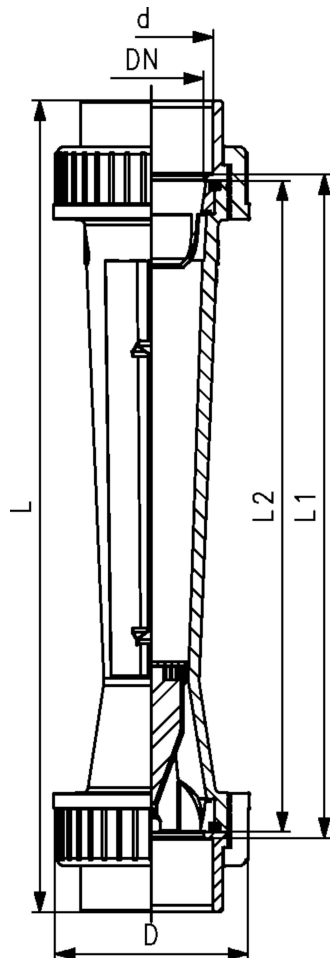

Taper tube in Polysulfone O-rings in EPDM Code	Weight (kg)	D (mm)	L (mm)	L1 (mm)	L2 (mm)	G (inch)
199 350 140	0.440	58	400	356	350	1 ½
199 350 141	0.440	58	400	356	350	1 ½
199 350 142	0.615	72	408	356	350	2
199 350 143	0.620	72	408	356	350	2
199 350 144	0.900	83	418	356	350	2 ¼
199 350 145	0.900	83	418	356	350	2 ¼
199 350 146	0.900	83	418	356	350	2 ¼
199 350 147	1.320	101	432	356	350	2 ¾
199 350 148	1.320	101	432	356	350	2 ¾
199 350 149	1.320	101	432	356	350	2 ¾
199 350 150	2.150	135	444	356	350	3 ½
199 350 151	2.150	135	444	356	350	3 ½
199 350 152	2.150	135	444	356	350	3 ½

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

Data sheet

valid from: 4/3/23



e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>