





3-Way ball valve type 543 Pro PVC-U oil free
Vertical diverter ball
With solvent cement sockets JIS

Model:

- Oil free
- Lockable lever as standard (DN10-DN50)
- For easy installation and removal
- Vertical inlet solvent cement spigot metric
- Ball seat PTFE
- Angle of operation 360° without turn limiter
- Turn limiter 90° enclosed, in different positions usable as a clip-on ring
- Integrated stainless steel mounting inserts
- Delivery status A-C opened, see flow scheme
- Z-dimension, valve end and union nut are compatible with type 543 (1stGeneration)



Option:

- Interface-module with position feedback sensor, incl. LED feedback (DN10-50)
- Manual spring return lever ("Dead man") (DN10-25)
- Pneumatic or electric actuators from GF
- Individual configuration of the valve possible

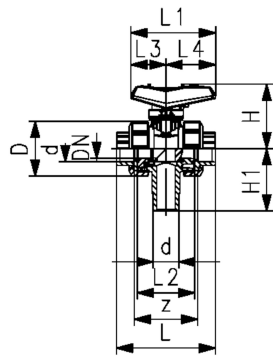

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
20	15	½	10	77	161 543 982	1	0.165	161 543 992	1	0.165
25	20	¾	10	146	161 543 983	1	0.243	161 543 993	1	0.253
32	25	1	10	260	161 543 984	1	0.354	161 543 994	1	0.365
40	32	1 ¼	10	437	161 543 985	1	0.611	161 543 995	1	0.611
50	40	1 ½	10	667	161 543 986	1	0.880	161 543 996	1	0.865
63	50	2	10	1293	161 543 987	1	1.604	161 543 997	1	1.572

D (mm)	H (mm)	H1 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	z (mm)
50	61	62	95	82	56	32	45	64
58	61	72	111	82	66	39	58	74
68	74	77	123	106	71	39	58	79
84	80	87	146	106	85	54	74	95
97	95	97	157	131	89	54	74	95
124	102	112	183	131	101	66	87	107



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>