


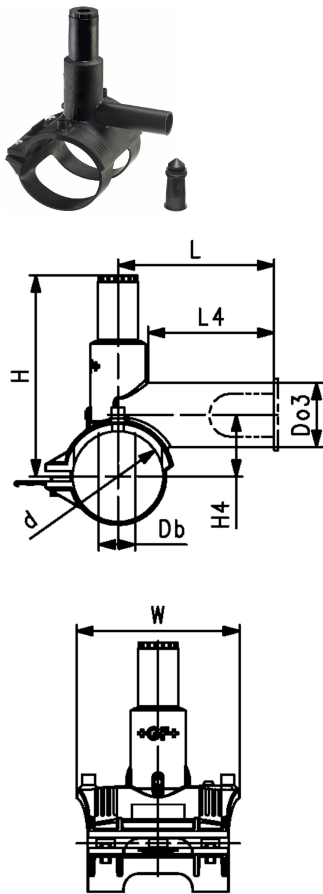

Tapping saddle with gas-stop type 1-5 bar Monobloc version

- 5 bar Gas (for pressure 1 bar -5 bar)
- With integrated cutter to tap live mains under pressure
- Complete with moulded-on lower part
- **Without overflow orifice**
- Set comes with Gas-Stop pre-assembled
- Installation instructions of Gas-Stop manufacturer are to be observed
- 4mm pin connectors
- Limited path fusion indicators
- Long fusion outlet
- O-ring-sealed screw cap

d	Do3	DN	Code	Weight
(mm)	(mm)	(mm)		(kg)
63	20	50	193 130 432	0.368
63	32	50	193 130 434	0.412
90	20	80	193 130 452	0.524
90	32	80	193 130 454	0.520
110	20	100	193 130 462	0.552
110	32	100	193 130 464	0.620
125	20	100	193 130 472	0.664
125	32	100	193 130 474	0.628
160	20	150	193 130 492	0.672
160	32	150	193 130 494	0.786

L	L4	Db	W	H	H4	Vn max	SDR pipe
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(m ³ /h)	
110	76	25	144	146	44	25	9 - 11
110	76	25	144	146	44	100	9 - 11
115	76	32	162	198	61	25	9 - 17.6
115	76	32	162	198	61	100	9 - 17.6
115	76	32	162	208	71	25	9 - 17.6
125	76	32	162	208	71	100	9 - 17.6
120	76	32	162	216	79	25	9 - 17.6
120	76	32	162	216	79	100	9 - 17.6
120	76	32	162	233	96	25	9 - 17.6
130	76	32	162	233	96	100	9 - 17.6

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>