


Wafer-Style, intermediate installation butterfly valve metal type 039
With pneumatic actuator - fail safe to close (FC)
Flange standard Metric/Inch/ASTM - PN10
Disc: stainless steel DIN Norm 1.4408 without coating

Model:

- Wafer Style
- Body GGG40 (A 395 M:88, EN-JS 1020 EN1563) Rilsan coating
- Installation length: EN 558 row 20
- Interface according to DIN/ISO 5211
- Pressure range: 10 bar (DN 50-200); 6 bar (DN 250); 4 bar (DN 300 - 600)
- Axis DN50 - DN300: Single-piece axis with square profile, material stainless steel DIN Norm 1.4021
- Flange connection: DN50 - DN300: PN6, PN10, ANSI 125/150 Lbs., BS 10-D/E

Option:

- Other liner material on request

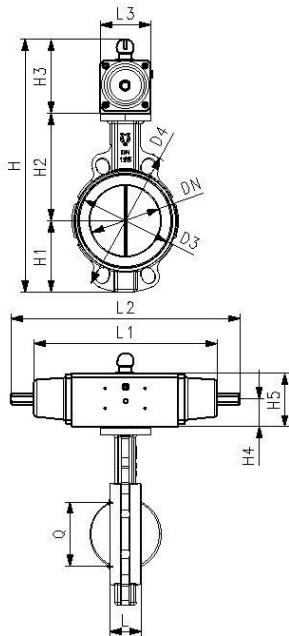

d	DN	Size	PN	kv-value	Disc: ductile	SP	Weight
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	iron/Rilsan®		(kg)
				(l/min)	coated EPDM Code		

63	50	2	10	3167	199 039 252	1	5.32
75	65	2 ½	10	4667	199 039 253	1	6.02
90	80	3	10	7167	199 039 254	1	8.80
110	100	4	10	11833	199 039 255	1	7.20
140	125	5	10	18333	199 039 256	1	11.00
160	150	6	10	26667	199 039 257	1	12.61
225	200	8	10	46667	199 039 258	1	21.08
280	250	10	6	78333	199 039 259	1	28.71
315	300	12	4	115000	199 039 260	1	39.23

d	Disc:	Liner: EPDM	Liner: NBR
(mm)	stainless steel EPDM Code	DVGW Code	Code
63	199 039 265	199 039 701	199 039 638
75	199 039 266	199 039 702	199 039 639
90	199 039 267	199 039 703	199 039 640
110	199 039 268	199 039 704	199 039 641
140	199 039 269	199 039 705	199 039 642
160	199 039 270	199 039 706	199 039 643
225	199 039 271	199 039 707	199 039 644
280	199 039 272	199 039 708	199 039 645
315	199 039 273	199 039 709	199 039 646

d	Type of actu-	H	H1	H2	H3	H4	L2	Q
(mm)	ator	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
63	PA-30	335	83	140	112	103	272	32
75	PA-30	357	93	152	112	103	272	51
90	PA-35	378	98	159	121	113	336	69
110	PA-40	428	111	178	139	130	364	89
140	PA-45	467	127	191	149	140	403	115
160	PA-50	515	143	203	169	150	418	143
225	PA-60	600	172	241	183	174	497	194
280	PA-60	652	204	275	173	174	497	243
315	PA-70	763	242	315	206	198	652	293

Data sheet

valid from: 4/3/25



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>