


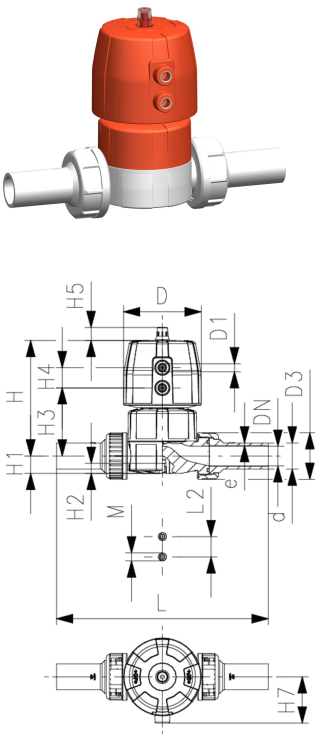

SYGEF标准型
气动隔膜阀DIASTAR 10
常闭(FC)
活接带对焊端 公制

型号:

- 材质：PVDF
- 相对于以往产品双倍流速
- 用一个压紧螺帽代替原先的四个螺栓
- 气路连接可以旋转90度
- 安装简单，易拆卸
- 总长度更短

选项:

- 可提供其他阀门配置
- 提供多种附件

* PN: PTFE

工作压力：单边

* O型圈材质: FKM

d	DN	PN*	kv-value	PTFE/	SP	weight	PTFE/FKM	SP	weight
(mm)	(mm)	(bar)	($\Delta p=1$ bar)	EPDM		(kg)	code		(kg)
			(l/min)	code					
20	15	10/10*	125	185 624 132	1	0,630	185 624 152	1	1,100
25	20	10/10*	271	185 624 133	1	1,405	185 624 153	1	1,760
32	25	10/10*	481	185 624 134	1	1,515	185 624 154	1	2,610
40	32	10/10*	759	185 624 135	1	2,570	185 624 155	1	3,760
50	40	10/10*	1263	185 624 136	1	4,697	185 624 156	1	6,220
63	50	10/6*	1728	185 624 137	1	5,327	185 624 157	1	7,800

d	FKM
(mm)	code
20	185 624 162
25	185 624 163
32	185 624 164
40	185 624 165
50	185 624 166
63	185 624 167

d	D	D1_G	H	H1	H2	H3	H4	H5	H7	L	L2	M	e	Lift =
(mm)	(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	Hx
														(mm)
20	68	1/8	101	14	12	60	24	16	43	196	25	M6	1,9	7
25	96	1/8	132	18	12	73	25	16	57	221	25	M6	1,9	10
32	96	1/8	143	22	12	84	25	16	57	234	25	M6	2,4	13
40	120	1/8	173	26	15	99	26	26	69	260	45	M8	2,4	15
50	150	1/4	214	32	15	119	36	26	88	284	45	M8	3,0	19
63	150	1/4	226	39	15	132	36	26	88	321	45	M8	3,0	23

d	近似英寸
(mm)	(inch)
20	1/2
25	3/4
32	1
40	1 1/4
50	1 1/2
63	2

Data sheet

valid from: 2025/2/7



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>