




Tapping saddle (kit) 旋轉式自鑽鞍座 (附鑽刀)
With 360° rotatable outlet


- 10 bar Gas / 16 bar Water
- With integrated cutter to tap live mains under pressure
- Complete with lower part
- 4 mm pin connectors
- Limited path fusion indicators
- Long fusion outlet
- O-ring-sealed screw cap
- Supplied as Kit with enclosed service line fitting (ELGEF Plus Coupler or Reducer)

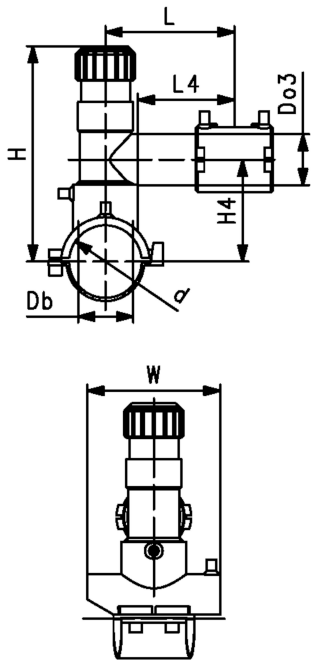

d	Do3	DN	PN	code	weight	L	L4	Db	W	H	H4	SDR pipe
(mm)	(mm)	(mm)	(bar)		(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
63	20	50	16	193 132 402	0,754	130	76	32	164	186	108	9 - 11
63	25	50	16	193 132 403	0,761	130	76	32	164	186	108	9 - 11
63	32	50	16	193 132 404	0,773	130	76	32	164	186	108	9 - 11
63	40	50	16	193 132 405	0,798	130	76	32	164	186	108	9 - 11
63	50	50	16	193 132 436	1,619	160	100	32	164	234	112	9 - 11
63	63	50	16	193 132 437	1,623	160	100	32	164	234	112	9 - 11
75	20	65	16	193 132 442	0,879	130	76	32	164	191	113	9 - 11
75	25	65	16	193 132 443	0,900	130	76	32	164	191	113	9 - 11
75	32	65	16	193 132 444	0,917	130	76	32	164	191	113	9 - 11
75	40	65	16	193 132 445	0,958	160	76	32	164	240	118	9 - 11
75	50	65	16	193 132 446	1,748	160	100	32	164	240	118	9 - 11
75	63	65	16	193 132 447	1,753	160	100	32	164	240	118	9 - 11
90	20	80	16	193 132 452	0,856	130	76	32	164	199	121	9 - 11
90	25	80	16	193 132 453	0,858	130	76	32	164	199	121	9 - 11
90	32	80	16	193 132 454	0,857	130	76	32	164	199	121	9 - 11
90	40	80	16	193 132 455	0,780	130	76	32	164	199	126	9 - 11
90	50	80	16	193 132 456	1,711	160	100	32	164	248	126	9 - 11
90	63	80	16	193 132 457	1,707	160	100	32	164	248	126	9 - 11
110	20	100	16	193 132 462	0,907	130	76	32	164	209	131	9 - 17.6
110	25	100	16	193 132 463	0,905	130	76	32	164	209	131	9 - 17.6
110	32	100	16	193 132 464	0,875	130	76	32	164	209	131	9 - 17.6
110	40	100	16	193 132 465	0,961	130	76	32	164	209	136	9 - 17.6
110	50	100	16	193 132 466	1,133	160	100	35	164	258	136	9 - 17.6
110	63	100	16	193 132 467	1,330	160	100	35	164	258	136	9 - 17.6
125	20	100	16	193 132 472	0,938	130	76	32	164	216	138	9 - 17.6
125	25	100	16	193 132 473	0,943	130	76	32	164	216	138	9 - 17.6
125	32	100	16	193 132 474	0,955	130	76	32	164	216	138	9 - 17.6
125	40	100	16	193 132 475	0,964	130	76	32	164	216	143	9 - 17.6
125	50	100	16	193 132 476	1,374	160	100	35	164	256	143	9 - 17.6
125	63	100	16	193 132 477	1,161	160	100	35	164	256	143	9 - 17.6
140	20	125	16	193 132 482	0,941	130	76	32	164	234	146	9 - 17.6
140	25	125	16	193 132 483	0,944	130	76	32	164	234	146	9 - 17.6
140	32	125	16	193 132 484	0,972	130	76	32	164	234	146	9 - 17.6
140	40	125	16	193 132 485	1,020	130	76	32	164	234	146	9 - 17.6
140	50	125	16	193 132 486	1,835	160	100	35	164	283	151	9 - 17.6
140	63	125	16	193 132 487	1,833	160	100	35	164	283	151	9 - 17.6
160	20	150	16	193 132 492	0,910	130	76	32	164	234	156	9 - 17.6
160	25	150	16	193 132 493	0,933	130	76	32	164	234	156	9 - 17.6
160	32	150	16	193 132 494	0,954	130	76	32	164	234	156	9 - 17.6
160	40	150	16	193 132 495	0,965	130	76	32	164	234	161	9 - 17.6
160	50	150	16	193 132 496	1,375	160	100	35	164	283	161	9 - 17.6
160	63	150	16	193 132 497	1,378	160	100	35	164	283	161	9 - 17.6
180	20	150	16	193 132 502	1,020	130	71	32	164	244	166	9 - 26
180	25	150	16	193 132 503	1,057	130	71	32	164	244	166	9 - 26
180	32	150	16	193 132 504	1,045	130	76	32	164	244	166	9 - 26
180	40	150	16	193 132 505	1,122	130	76	32	164	244	171	9 - 26
180	50	150	16	193 132 506	1,938	160	100	35	164	293	171	9 - 26
180	63	150	16	193 132 507	1,918	160	100	35	164	293	171	9 - 26

Data sheet

valid from: 2025/1/24

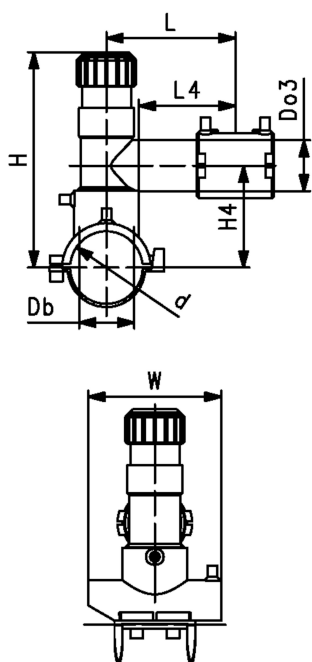

d	Do3	DN	PN	code	weight	L	L4	Db	W	H	H4	SDR pipe
(mm)	(mm)	(mm)	(bar)		(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
200	20	200	16	193 132 512	1,065	130	76	32	164	254	176	9 - 26
200	25	200	16	193 132 513	1,065	130	71	32	164	254	176	9 - 26
200	32	200	16	193 132 514	1,095	130	76	32	164	254	176	9 - 26
200	40	200	16	193 132 515	1,131	130	76	32	164	254	181	9 - 26
200	50	200	16	193 132 516	1,957	160	100	35	164	303	181	9 - 26
200	63	200	16	193 132 517	1,900	160	100	35	164	303	181	9 - 26
225	20	200	16	193 132 522	1,460	130	71	32	164	266	188	11 - 26
225	25	200	16	193 132 523	0,991	130	71	32	164	266	188	11 - 26
225	32	200	16	193 132 524	1,095	130	76	32	164	266	188	11 - 26
225	40	200	16	193 132 525	1,134	130	76	32	164	266	193	11 - 26
225	50	200	16	193 132 526	1,921	160	100	35	164	315	193	11 - 26
225	63	200	16	193 132 527	1,951	160	100	35	164	315	193	11 - 26
250	20	250	16	193 132 532	1,079	130	76	32	164	279	201	11 - 26
250	25	250	16	193 132 533	1,095	130	76	32	164	279	201	11 - 26
250	32	250	16	193 132 534	1,092	130	76	32	164	279	201	11 - 26
250	40	250	16	193 132 535	1,113	160	76	32	164	279	206	11 - 26
250	50	250	16	193 132 536	1,971	160	100	35	164	328	206	11 - 26
250	63	250	16	193 132 537	1,923	160	100	35	164	328	206	11 - 26
280	32	250	16	193 132 548	1,455	160	100	35	164	343	206	11 - 26
280	40	250	16	193 132 549	1,500	160	100	35	164	343	206	11 - 26
280	50	250	16	193 132 550	1,500	160	100	35	164	343	206	11 - 26
280	63	250	16	193 132 551	1,510	160	100	35	164	343	206	11 - 26
315	32	300	16	193 132 558	1,648	160	100	35	164	381	206	17 - 33
315	40	300	16	193 132 559	1,015	160	100	35	164	381	206	17 - 33
315	50	300	16	193 132 560	1,440	160	100	35	164	381	206	17 - 33
315	63	300	16	193 132 561	1,602	160	100	35	164	381	206	17 - 33

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>