




SYGEF Standard Check valve type 561
Without spring
With fusion sockets metric

Model:

- Material: PVDF
- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

Note: CK-54 is defined in both the high purity and low purity specs. GF is not a vendor for low purity CK-54.

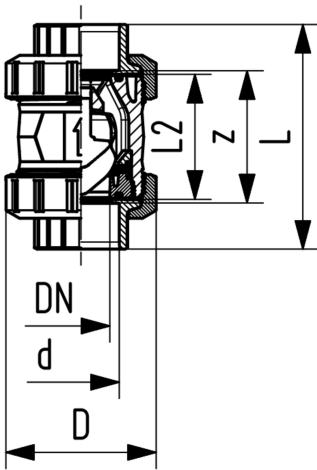

d (mm)	FKM Code
16	175 561 011
20	175 561 012
25	175 561 013
32	175 561 014
40	175 561 015
50	175 561 016
63	175 561 017
75	175 561 018
90	175 561 019
110	175 561 020

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>