


Van Stone Flange 300lb (S) Schedule 80 Harvel® PVC

- ANSI 300 Class according to ANSI B16.5
- 150 psi @ 73°F (10.3 bar @ 22.7°C)

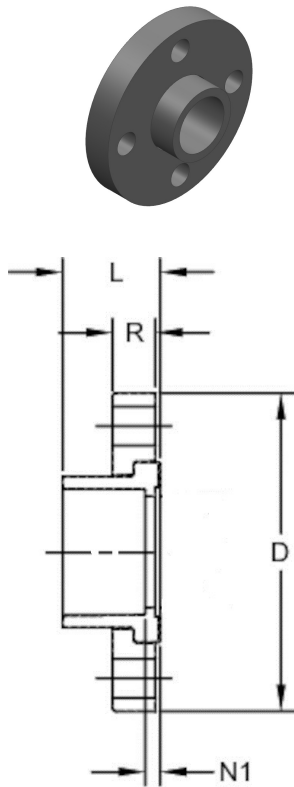

Size (inch)	P/L	Code	Pack Qty	# holes	Bolt Dia. (inch)	bolt cir. dia. (inch)	D (inch)	L (inch)	N1 (inch)	R (inch)	Design
½	608	854-005-300	5	4	½	2.63	3.75	1.03	0.11	0.57	FAB
¾	608	854-007-300	5	4	¾	3.25	4.63	1.15	0.13	0.59	FAB
1	608	854-010-300	5	4	¾	3.50	4.88	1.38	0.11	0.66	FAB
1 ¼	608	854-012-300	5	4	¾	3.88	5.25	1.45	0.14	0.69	FAB
1 ½	608	854-015-300	5	4	¾	4.50	6.13	1.59	0.15	0.75	FAB
2	608	854-020-300	5	8	¾	5.00	6.50	1.76	0.20	0.82	FAB
2 ½	608	854-025-300	5	8	¾	5.88	7.50	2.05	0.22	0.98	FAB
3	608	854-030-300	5	8	¾	6.63	8.25	2.25	0.30	1.02	FAB
4	608	854-040-300	5	8	¾	7.88	10.00	2.65	0.34	1.10	FAB
6	608	854-060-300	2	12	¾	10.63	12.50	3.45	0.35	1.25	FAB
8	608	854-080-300	2	12	¾	13.00	15.00	4.50	0.40	1.71	FAB
10	602	854-100-300	2	16	1	15.25	17.50	5.63	0.50	1.73	FAB
12	602	854-120-300	2	16	1 ½	17.75	20.50	6.69	0.56	1.72	FAB

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>