


PROGEF Standard Diaphragm valve type 515 With socket fusion spigots metric

Model:

- Material: PP-H
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Handwheel with built-in locking mechanism
- Overall length EN 558

Option:

- Self adjusting multifunctional module with integrated limit switches

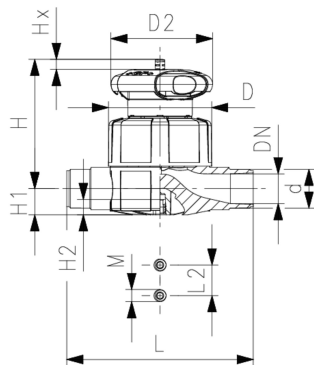

d (mm)	EPDM Code	PTFE/EPDM Code	FKM Code	weight (lb)
20	167 515 012	167 515 032	167 515 062	0.657
25	167 515 013	167 515 033	167 515 063	0.646
32	167 515 014	167 515 034	167 515 064	2.094
40	167 515 015	167 515 035	167 515 065	2.443
50	167 515 016	167 515 036	167 515 066	4.535
63	167 515 017	167 515 037	167 515 067	5.741

d (mm)	D (mm)	D2 (mm)	L (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	M	Lift = Hx (mm)	e (mm)	closest inch (inch)
20	65	65	124	25	73	14	12	M6	7	1.9	1/2
25	80	65	144	25	81	18	12	M6	10	2.3	3/4
32	88	87	154	25	107	22	12	M6	13	2.9	1
40	101	87	174	45	115	26	15	M8	15	3.7	1 1/4
50	117	135	194	45	148	32	15	M8	19	4.6	1 1/2
63	144	135	223	45	166	39	15	M8	25	5.8	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>