





Lug-Style, end Installation butterfly valve metal type 038
With pneumatic actuator - double acting (DA) - Actuator CN
Flange standard - ANSI
Disc: stainless steel DIN Norm 1.4408 without coating

Model:

- Lug Style
- Body GGG40 (A 395 / A395 M-99, EN-JIS 1020 EN1563) Rilsan® coating
- Body from DN350 Epoxy® coating
- Installation length: EN 558 row 20
- Interface according to DIN EN ISO 5211
- Pressure range: 10 bar (DN 50-200); 6 bar (DN 250); 4 bar (DN 300 - 600)
- Axis DN50 - DN300: Single-piece axis with square profile, material stainless steel DIN Norm 1.4021
- Axis DN350 - DN600: 2-pieces axis keyway profile, material: stainless steel DIN Norm 1.4021
- Flange connection: DN50 - DN300: PN6, PN10, ANSI 125/150 Lbs., BS 10-D/E
- Flange connection: PN10

Option:

- Other liner material on request

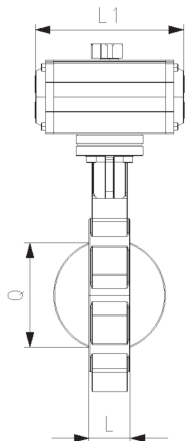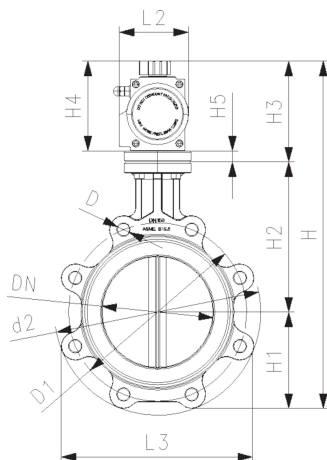

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	Liner: EPDM Code	Weight (kg)	Liner: FKM Code	PF
63	50	2	10	3140	199 038 834	5.30	199 038 848	3 39 226 127
75	65	2 ½	10	4570	199 038 835	6.40	199 038 849	3 39 226 127
90	80	3	10	7140	199 038 836	8.10	199 038 850	3 39 226 127
110	100	4	10	11710	199 038 837	11.10	199 038 851	3 39 226 127
140	125	5	10	18570	199 038 838	12.90	199 038 852	3 39 226 127
160	150	6	10	27130	199 038 839	18.60	199 038 853	3 39 226 127
225	200	8	10	47130	199 038 840	25.40	199 038 854	3 39 226 127
280	250	10	10	77110	199 038 841	42.40	199 038 855	3 39 226 127
315	300	12	10	114240	199 038 842	64.00	199 038 856	3 39 226 127
350	350	14	10	143360	199 038 843	180.10		3 39 226 003
400	400	16	10	186700	199 038 844	221.10		3 39 226 003
450	450	18	10	258390	199 038 845	251.30		3 39 226 003
500	500	20	10	316730	199 038 846	295.50		3 39 226 003
630	600	24	10	431750	199 038 847	458.00		3 39 226 003

d (mm)	Sleeve: NBR Code	Type of actuator	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	L1 (mm)	L2 (mm)
63		CN52	317	63	140	15	99	60	144
75		CN52	339	73	152	15	99	60	144
90		CN52	354	81	159	15	99	60	144
110		CN63	402	97	178	15	112	72	169
140		CN63	430	112	191	15	112	72	169
160		CN75	480	122	203	15	140	90	212
225		CN83	559	149	245	15	150	100	255
280		CN105	665	203	275	25	162	112	264
315		CN125	755	241	315	25	174	124	295
350		CHCN160 DA							
400		CHCN190 DA							
450		CHCN210 DA							
500		CHCN210 DA							
630		CHCN350 DA							

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 3/25/25



Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>