
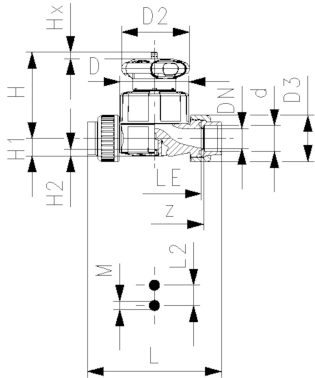




Membranventil Typ 514 PVC-U Mit Klebemuffen metrisch

Ausführung:

- Doppelter Durchfluss im Vergleich zum Vorgängermodell
- Eine zentrale Gehäusemutter ersetzt vier Schrauben
- Verriegelbares Handrad
- Leicht ein- und ausbaubar
- Kurze Gesamtlänge

Option:

- Armatur individuell konfigurierbar
- Multifunktionsmodul mit selbstjustierenden Endschaltern
- PN16 konfigurierbar

*Material O-Ring: FKM

d (mm)	DN (mm)	Zoll (inch)	PN (bar)	kv-Wert ($\Delta p=1$ bar) (l/min)	NBR Code	NPK	SP	Gewicht (kg)
16	10	3/8	10	125	161 514 001	581 351	1	0.324
20	15	1/2	10	125	161 514 002	581 352	1	0.328
25	20	3/4	10	271	161 514 003	581 353	1	0.492
32	25	1	10	481	161 514 004	581 354	1	0.721
40	32	1 1/4	10	759	161 514 005	581 355	1	1.070
50	40	1 1/2	10	1263	161 514 006	581 356	1	1.643
63	50	2	10	1728	161 514 007	581 357	1	2.510

d (mm)	EPDM Code	NPK	SP	Gewicht (kg)	PTFE/EPDM Code	NPK	SP	Gewicht (kg)
16	161 514 011	581 351	1	0.319	161 514 031		1	0.335
20	161 514 012	581 352	1	0.323	161 514 032		1	0.339
25	161 514 013	581 353	1	0.472	161 514 033		1	0.506
32	161 514 014	581 354	1	0.704	161 514 034		1	0.748
40	161 514 015	581 355	1	0.973	161 514 035		1	1.105
50	161 514 016	581 356	1	1.618	161 514 036		1	1.679
63	161 514 017	581 357	1	2.484	161 514 037		1	2.548

d (mm)	FKM Code	NPK	SP	Gewicht (kg)	PTFE/FKM* Code	NPK	SP	Gewicht (kg)
16	161 514 061		1	0.328	800 047 300		1	0.331
20	161 514 062		1	0.332	800 047 301		1	0.335
25	161 514 063		1	0.499	800 047 303		1	0.499
32	161 514 064		1	0.732	800 047 304		1	0.731
40	161 514 065		1	1.087	800 047 306		1	1.084
50	161 514 066		1	1.669	800 047 308		1	1.662
63	161 514 067		1	2.555	800 047 309		1	2.547

d (mm)	D (mm)	D2 (mm)	D3 (mm)	H (mm)	H1 (mm)	H2 (mm)	L (mm)	L2 (mm)	M	z (mm)	Hub = Hx (mm)	closest inch (inch)	LE (mm)
16	65	65	43	73	14	12	170	25	M6	142	7	3/8	90
20	65	65	43	73	14	12	128	25	M6	96	7	1/2	90
25	80	65	51	81	18	12	152	25	M6	114	10	3/4	108
32	88	87	58	107	22	12	166	25	M6	122	13	1	116
40	101	87	72	115	26	15	192	45	M8	140	15	1 1/4	134
50	117	135	83	148	32	15	222	45	M8	160	19	1 1/2	154
63	144	135	100	166	39	15	266	45	M8	190	25	2	184

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>