




PROGEF Standard Ball valve type 180
24V
With manual emergency override
With butt fusion spigots PP-H SDR11 ISO

Model:

- Voltage 24V AC/DC
- Factory set control range 90°<)
- Basic position A-C opened, activated position B-C opened, see flow scheme
- Integrated stainless steel mounting inserts
- Material: PP-H




Option:

- Other valve and actuator configurations available
- Fail-safe return unit, Monitoring board, Position controller, Profibus DP board

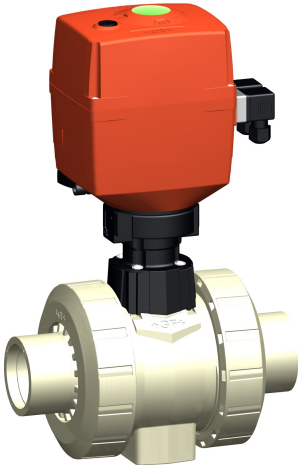

Data sheet

valid from: 2/8/25

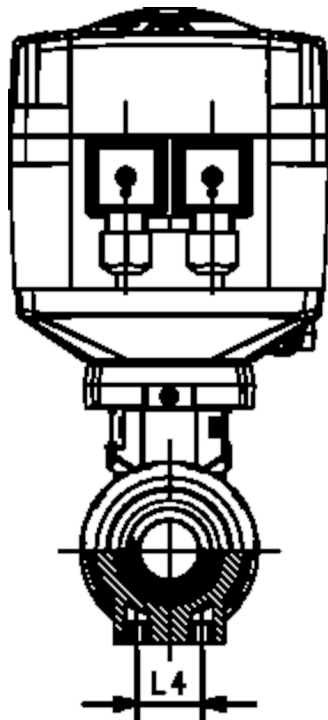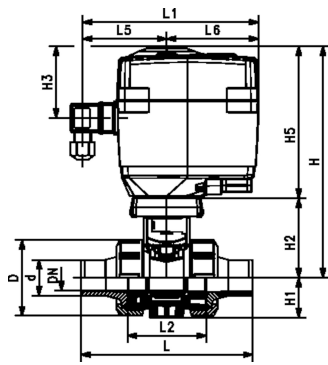

d (mm)	DN (mm)	PN (bar)	Cv-value (l/min)	EA	EPDM Code	FKM Code	weight (kg)
20	15	10	185	EA25	199 180 363	199 180 373	2.100
25	20	10	350	EA25	199 180 364	199 180 374	2.200
32	25	10	700	EA25	199 180 365	199 180 375	2.300
40	32	10	1000	EA25	199 180 366	199 180 376	2.600
50	40	10	1600	EA25	199 180 367	199 180 377	3.000
63	50	10	3100	EA25	199 180 368	199 180 378	3.800
75	65	10	5000	EA45	199 180 369	199 180 379	6.200
90	80	10	7000	EA120	199 180 370	199 180 380	7.200
110	100	10	11000	EA120	199 180 371	199 180 381	11.200

d (mm)	D (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	L7 (mm)
20	50	227	27	60	94	12	167	130	180	56	130	25	97	83	122
25	58	231	30	64	94	12	167	143	180	65	150	25	97	83	122
32	68	237	36	70	94	12	167	150	180	71	160	25	97	83	122
40	84	243	44	76	94	12	167	171	180	85	180	45	97	83	122
50	97	249	51	82	94	15	167	191	180	89	200	45	97	83	122
63	124	264	64	97	94	15	167	220	180	101	230	45	97	83	122
75	166	323	85	156	94	15	167	266	180	136	290	70	98	82	122
90	200	335	105	168	94	15	167	264	180	141	310	70	98	82	122
110	238	342	123	175	94	22	167	301	180	164	350	120	98	82	122

d (mm)	M	e (mm)	closest inch (inch)
20	M6	1.9	1/2
25	M6	2.3	3/4
32	M6	2.9	1
40	M6	3.7	1 1/4
50	M8	4.6	1 1/2
63	M8	5.8	2
75	M8	6.8	2 1/2
90	M8	8.2	3
110	M12	10.0	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>