


Check valve type 561 PVC-C
With solvent cement sockets Inch ASTM
Inclusive 2 threaded valve ends NPT

Model:

- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

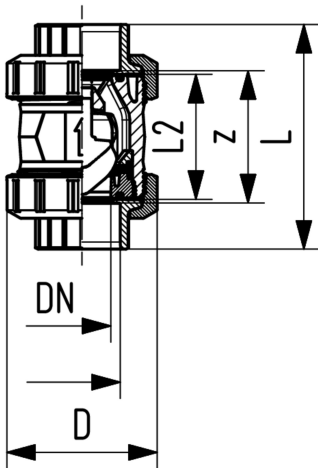

d (mm)	Thread Type	Size (inch)	EPDM Code	FKM Code
16	NPT	$\frac{3}{8}$	163 561 101	163 561 111
20	NPT	$\frac{1}{2}$	163 561 102	163 561 112
25	NPT	$\frac{3}{4}$	163 561 103	163 561 113
32	NPT	1	163 561 104	163 561 114
40	NPT	1 $\frac{1}{4}$	163 561 105	163 561 115
50	NPT	1 $\frac{1}{2}$	163 561 106	163 561 116
63	NPT	2	163 561 107	163 561 117
75	NPT	2 $\frac{1}{2}$	163 561 108	163 561 118
90	NPT	3	163 561 109	163 561 119
110	NPT	4	163 561 110	163 561 120

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>