




ELGEF Plus Branch saddle topload PE100
d315-1000mm / SDR11 / Outlet d160-d225 mm

- 10 bar Gas / 16 bar Water
- Branch Saddle installation only with installation set Topload TL225 (799.300.807)
- Angle adaptors (799.350.340) for fusion cable required
- 4 mm pin connectors
- Limited path fusion indicators
- Spigot outlet for butt- and electrofusion
- Full pressure applicable - no derating factor
- With integrated pressure test port for test cap (799.199.287)

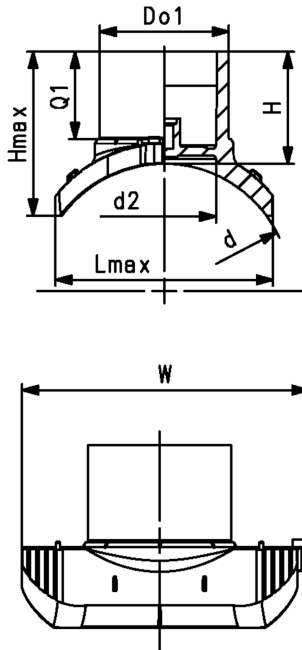

d	d2	Do1	DN	PN	Code	Weight	Lmax	Q1	W	H	Hmax	Suitable for
(mm)	(mm)	(mm)	(mm)	(bar)		(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	
315	129	160	300	16	193 135 202	2.548	273	106	322	136	204	SDR 11-26
315	177	225	300	16	193 135 204	4.625	300	126	360	165	262	SDR 11-26
355	129	160	350	16	193 135 212	2.348	270	106	320	136	200	SDR 11-26
355	177	225	350	16	193 135 214	4.594	312	126	354	164	250	SDR 11-26
400	129	160	400	16	193 135 222	2.623	290	106	320	133	193	SDR 11-26
400	177	225	400	16	193 135 224	4.612	325	126	364	164	241	SDR 11-26
450	129	160	450	16	193 135 232	2.429	270	106	320	136	190	SDR 11-26
450	177	225	450	16	193 135 234	4.301	320	126	364	164	234	SDR 11-26
500	129	160	500	16	193 135 242	2.690	270	106	320	136	182	SDR 11-26
500	177	225	500	16	193 135 244	4.569	312	126	354	164	225	SDR 11-26
560	129	160	600	16	193 135 252	2.495	303	106	320	180	180	SDR 11-26
560	177	225	600	16	193 135 254	4.321	341	126	364	222	222	SDR 11-26
630	129	160	600	16	193 135 262	2.616	304	106	320	133	172	SDR 11-33
630	177	225	600	16	193 135 264	4.750	349	126	364	164	212	SDR 11-33
710	129	160	700	16	193 135 272	2.504	304	106	320	132	169	SDR 11-33
710	177	225	700	16	193 135 274	4.360	348	126	360	165	207	SDR 11-33
800	129	160	800	16	193 135 282	2.399	304	106	320	132	166	SDR 11-33
800	177	225	800	16	193 135 284	4.553	356	126	360	164	200	SDR 11-33
900	177	225	900	16	193 135 294	4.390	356	126	360	164	200	SDR 11-33
1000	177	225	1000	16	193 135 304	4.262	356	126	360	164	196	SDR 11-33

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>