

Type 519 Zero Static Diaphragm Valve
PROGEF Standard PP
Butt fusion spigots metric


Model:

- Material: PP-H
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Handwheel with built-in locking mechanism
- Smallest possible dead space

Option:

- Individual configuration of the valve
- Self adjusting multifunctional module with integrated limit switches

* O-Ring material: FKM

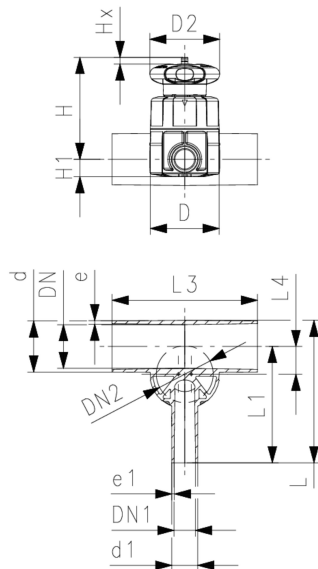

d	d1	DN	DN1	Size	Valve Size d	PN	Cv-value	SDR	EPDM Code	PTFE/EPDM Code	weight
(mm)	(mm)	(mm)	(mm)	(inch)	(mm)	(bar)	(l/min)				(kg)
20	20	15	15	½	20	10	57	11	167 519 101	167 519 301	0.321
25	20	20	15	¾	25	10	89	11	167 519 103	167 519 303	0.397
25	25	20	20	¾	25	10	118	11	167 519 104	167 519 304	0.399
32	20	25	15	1	25	10	80	11	167 519 107	167 519 307	0.424
32	25	25	20	1	25	10	105	11	167 519 108	167 519 308	0.426
32	32	25	25	1	32	10	231	11	167 519 109	167 519 309	0.980
40	20	32	15	1 ¼	32	10	85	11	167 519 112	167 519 312	0.553
40	40	32	32	1 ¼	32	10	187	11	167 519 115	167 519 315	1.034
50	20	40	15	1 ½	25	10	86	11	167 519 118	167 519 318	0.485
50	25	40	20	1 ½	32	10	160	11	167 519 119	167 519 319	1.054
50	32	40	25	1 ½	32	10	206	11	167 519 120	167 519 320	1.056
63	20	50	15	2	25	10	84	11	167 519 125	167 519 325	0.525
63	25	50	20	2	32	10	150	11	167 519 126	167 519 326	1.097
63	32	50	25	2	32	10	184	11	167 519 127	167 519 327	1.100

d	D	D2	H	L	L1	L3	L4	e	Lift = Hx	DN2	closest inch	e1
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(inch)	(mm)
20	65	65	75	117	96	162	12	1.9	7	15	½	1.9
25	80	65	80	133	108	162	16	2.3	10	20	¾	1.9
25	80	65	80	133	108	162	16	2.3	10	20	¾	2.3
32	80	65	84	142	120	162	19	2.9	10	20	1	1.9
32	80	65	84	142	120	162	19	2.9	10	20	1	2.3
32	88	87	107	145	120	160	19	2.9	13	25	1	2.9
40	88	87	115	149	128	180	23	3.7	13	25	1 ¼	1.9
40	88	87	115	174	153	180	23	3.7	13	25	1 ¼	3.7
50	80	65	97	160	134	180	27	4.6	10	20	1 ½	1.9
50	88	87	120	160	134	180	28	4.6	13	25	1 ½	2.3
50	88	87	120	160	134	180	28	4.6	13	25	1 ½	2.9
63	80	65	104	177	144	180	33	5.8	10	20	2	1.9
63	88	87	127	177	144	180	35	5.8	13	25	2	2.3
63	88	87	127	177	144	180	35	5.8	13	25	2	2.9

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>