


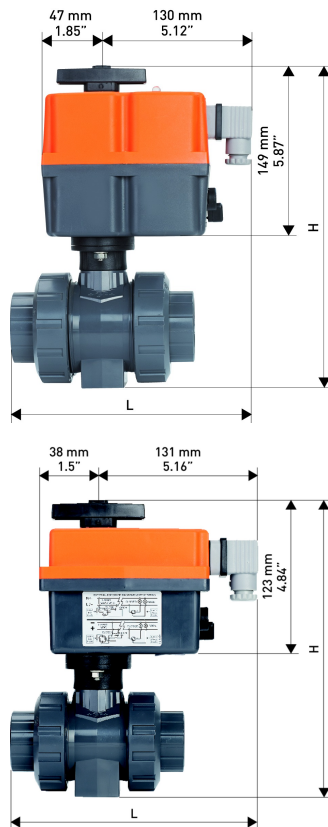

PROGEF Standard Ball valve type 104 100-230V With fusion sockets metric

Model:

- Material: PP-H
- Voltage according data sheet
- Control range 90°<
- For easy installation and removal
- Integrated stainless steel mounting inserts

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	Tension	EPDM Code	Weight (kg)	FKM Code
16	10	10	70	100-230V	199 104 502	0.965	199 104 512
20	15	10	185	100-230V	199 104 503	0.965	199 104 513
25	20	10	350	100-230V	199 104 504	1.010	199 104 514
32	25	10	700	100-230V	199 104 505	1.055	199 104 515
40	32	10	1000	100-230V	199 104 506	1.180	199 104 516
50	40	10	1600	24-240V	199 104 547	1.860	199 104 557
63	50	10	3100	24-240V	199 104 548	2.115	199 104 558

H (mm)	L (mm)	Type of actuator	B (mm)
194	178.5	10Nm	50
194	178.5	10Nm	50
207	185.5	10Nm	58
217	190.5	10Nm	68
236	198.5	10Nm	84
275	203.5	20Nm	97
307	214.0	20Nm	124

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>