



Intermediate element to butterfly valve type 565 For Pneumatic actuators, function FC/FO and DA


- Intermediate kits include different screws, hexagon nuts, washer, switching rings, etc. (depends on actuator and dimension)
- Intermediate elements are required as a connection between valve and Actuator.

Note:

The switching ring for the double sensor for electrical position feedback is supplied with each intermediate element.



Suitable for	Size (inch)	DN (mm)	Acc.to ISO 5211	Code	D5 (mm)	Y1 (mm)
d63-75 PA35 DA	2 - 2 1/2	50 - 65	F05/F07	199 565 920	90	15
d63-75 PA30 FC / d63-75 PA30 FO / d90 PA40 DA	2 - 2 1/2	50 - 65	F05/F07	199 565 921	90	15
d90 PA30 FC / d90 PA30 FO	3	80	F05/F07	199 565 922	90	15
d110 PA40 FC / d110 PA40 FO / d110-140 PA40 DA	4	100	F07	199 565 923	---	---
d140 PA45 FC / d140 PA45 FO	5	125	F07	199 565 924	---	---
d160 PA50 FC / d160 PA50 FO / d160-225 PA55-60 DA	6	150	F07	199 565 925	---	---
d225 PA60 FC / d225 PA60 FO	8	200	F07/F10	199 565 929	125	18
d280 PA65 DA	8	250	F10	199 565 926	125	18
d280 PA65 FC / d280 PA65 FO	10	250	F10	199 565 927	125	18
d315 PA70 FC / d315 PA70 FO	12	300	F10	199 565 928	125	18

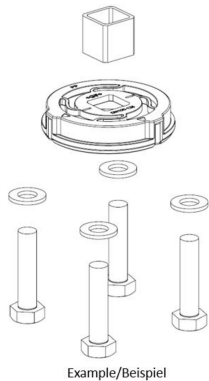

Example/Beispiel

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>