


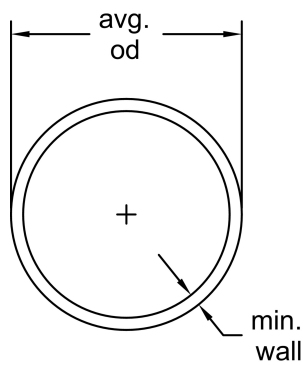

Harvel® Industrial PLUS Schedule 40 PVC Plain End Pipe 20 Ft Lengths - White

- Max Water Pressure at 73°F (22.7°C) with solvent-cemented joints
- Meets NSF[®]-pw-G
- Meets CAN/CSA B137.3 Requirements

Size (inch)	P/L	Plain End Code	Lift Qty (ft)	Average O.D. (inch)	Min. Wall (inch)	Wt/Ft (lbs/ft)	Max Water Pressure (psi)
½	H17	H0400050PW2000	5700	0.840	0.109	0.161	600
¾	H17	H0400075PW2000	5260	1.050	0.113	0.214	480
1	H17	H0400100PW2000	4280	1.315	0.133	0.315	450
1 ¼	H17	H0400125PW2000	2360	1.660	0.140	0.426	370
1 ½	H17	H0400150PW2000	2060	1.900	0.145	0.509	330
2	H17	H0400200PW2000	1660	2.375	0.154	0.682	280
2 ½	H17	H0400250PW2000	1080	2.875	0.203	1.076	300
3	H17	H0400300PW2000	840	3.500	0.216	1.409	260
3 ½	H17	H0400350PW2000	680	4.000	0.226	1.697	240
4	H17	H0400400PW2000	520	4.500	0.237	2.006	220
5	H17	H0400500PW2000	400	5.563	0.258	2.726	190
6	H17	H0400600PW2000	340	6.625	0.280	3.535	180
8	H17	H0400800PW2000	220	8.625	0.322	5.305	160
10	H17	H0401000PW2000	80	10.750	0.365	7.532	140
12	H17	H0401200PW2000	60	12.750	0.406	9.949	130
14	H51	H0401400PW2000	60	14.000	0.437	11.810	130
16	H51	H0401600PW2000	60	16.000	0.500	15.416	130
18	H51	H0401800PW2000	60	18.000	0.562	20.112	130
20	H51	H0402000PW2000	40	20.000	0.593	23.624	120
24	H51	H0402400PW2000	40	24.000	0.687	32.873	120

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>