




SYGEF Plus tee 90° reduced
SDR21/PN16
High Purity clean-room product ISO Class 5 (100)

Model:

- Material: PVDF-HP

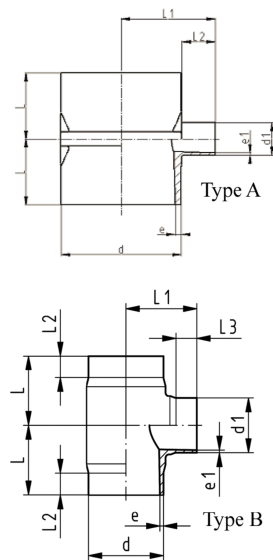

d	d1	PN	SDR	FM	Type	Code	Weight	L	L1	L2	L3	e	e1
(mm)	(mm)	(bar)					(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
63	20	16	21	BCF, IR	A	735 208 956	0.250	60	67	25	35	3.0	1.9
63	25	16	21	BCF, IR	A	735 208 957	0.245	60	66	25	34	3.0	1.9
63	32	16	21	BCF, IR	A	735 208 958	0.257	60	67	25	25	3.0	2.4
63	40	16	21	BCF, IR	A	735 208 959	0.254	60	66	25	26	3.0	2.4
75	20	16	21	BCF, IR	A	735 208 961	0.348	65	69	25	31	3.6	1.9
75	25	16	21	BCF, IR	A	735 208 962	0.356	65	72	25	34	3.6	1.9
75	32	16	21	BCF, IR	A	735 208 963	0.308	65	69	25	31	3.6	2.4
75	40	16	21	BCF, IR	A	735 208 964	0.312	65	72	25	26	3.6	2.4
75	50	16	21	BCF, IR	A	735 208 965	0.372	65	69	25	26	3.6	3.0
90	20	16	21	BCF, IR	A	735 208 967	0.470	65	76	25	31	4.3	1.9
90	25	16	21	BCF, IR	A	735 208 968	0.466	65	79	25	34	4.3	1.9
90	32	16	21	BCF, IR	A	735 208 969	0.405	65	76	25	31	4.3	2.4
90	40	16	21	BCF, IR	A	735 208 970	0.476	65	79	25	26	4.3	2.4
90	50	16	21	BCF, IR	B	735 208 940	0.490	90	90	39	32	4.3	3.0
90	63	16	21	BCF, IR	B	735 208 941	0.494	90	90	39	32	4.3	3.0
90	75	16	21	BCF, IR	B	735 208 942	0.512	90	90	39	32	4.3	3.6
110	20	16	21	BCF, IR	A	735 208 974	0.641	65	86	25	31	5.3	1.9
110	25	16	21	BCF, IR	A	735 208 975	0.570	65	89	25	34	5.3	1.9
110	32	16	21	BCF, IR	A	735 208 976	0.570	65	86	25	31	5.3	2.4
110	40	16	21	BCF, IR	A	735 208 977	0.640	65	89	25	26	5.3	2.4
110	50	16	21	BCF, IR	A	735 208 978	0.640	65	86	25	26	5.3	3.0
110	63	16	21	BCF, IR	B	735 208 948	0.889	110	110	48	40	5.3	3.0
110	75	16	21	BCF, IR	B	735 208 949	0.919	110	110	48	40	5.3	3.6
110	90	16	21	BCF, IR	B	735 208 950	0.936	110	110	48	40	5.3	4.3
160	90	16	21	IR	B	735 208 687	2.902	155	130	60	25	7.7	4.3
160	110	16	21	IR	B	735 208 686	3.078	155	130	60	25	7.7	5.3
225	90	16	21	IR	B	735 208 695	5.423	155	160	60	25	10.8	4.3
225	110	16	21	IR	B	735 208 694	5.460	155	160	60	25	10.8	5.3

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>