






SYGEF 标准型
PVDF 电动三通球阀 543Pro#100-230V
 水平型/T型孔
 带焊接承插端 公制ISO

型号:

- 材质：PVDF
- 电压：100-230V AC,50-60Hz
- 控制范围：90°
- 初始位A-B-C开，受控位B-C开，见流程图
- 通过调整限位开关可切换到其他位置
- 加热元件，位置反馈（开/关/中间位置）
- 内置不锈钢固定螺孔

选项:

- 可选附件：失效返回单元，监测板，定位器，Profibus DP板

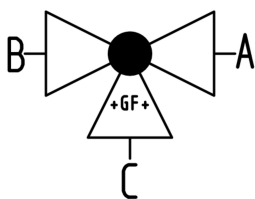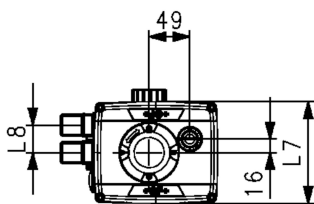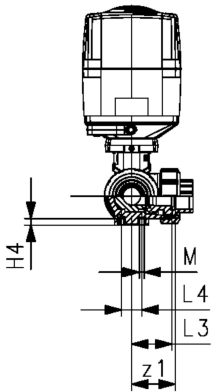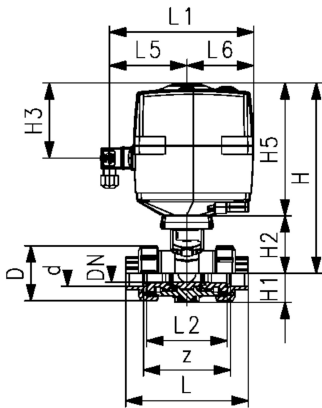

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EA	FKM code	SP	weight (kg)
16	10	3/8	10	140	EA25	199 169 112	1	2,189
20	15	1/2	10	200	EA25	199 169 113	1	2,196
25	20	3/4	10	470	EA25	199 169 114	1	2,354
32	25	1	10	793	EA25	199 169 115	1	2,591
40	32	1 1/4	10	1290	EA25	199 169 116	1	3,117
50	40	1 1/2	10	1910	EA25	199 169 117	1	3,683
63	50	2	10	3100	EA25	199 169 118	1	5,383

d (mm)	D (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H5 (mm)	H6 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	L7 (mm)
16	50	231	28	64	94	167	8	110	180	72	36	25	97	83	122
20	50	231	28	64	94	167	8	112	180	72	36	25	97	83	122
25	58	240	32	73	94	167	8	129	180	85	43	25	97	83	122
32	68	240	36	73	94	167	8	146	180	98	49	25	97	83	122
40	84	251	45	84	94	167	9	170	180	118	59	45	97	83	122
50	97	251	51	84	94	167	9	193	180	135	68	45	97	83	122
63	124	273	65	106	94	167	9	244	180	176	88	45	97	83	122

d (mm)	L8 (mm)	M (mm)	z (mm)	z1 (mm)	近似英寸 (inch)
16	33	6	82	41	3/8
20	33	6	82	41	1/2
25	33	6	97	49	3/4
32	33	6	110	55	1
40	33	8	132	66	1 1/4
50	33	8	151	76	1 1/2
63	33	8	188	94	2

Data sheet

valid from: 2025/12/11



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>