


Data sheet

valid from: 8/1/24



Tee 90° ABS metric

- >d225 - maximum operating temperature: +40°C

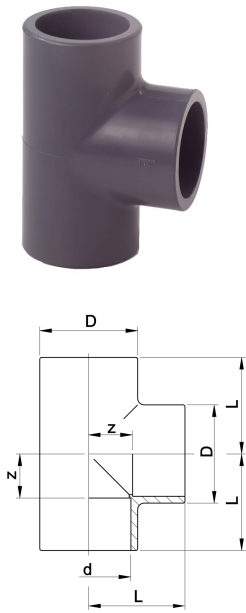

d	Size	PN	d	Code	SP	Weight	closest	z	D	L
(mm)	(inch)	(bar)	(inch)			(kg)	inch	(mm)	(mm)	(mm)
							(inch)			
20		16		729 200 106	10	0.015	½	11	25	27
25		16		729 200 107	10	0.025	¾	14	31	33
32		10		729 200 108	10	0.042	1	17	40	39
40		10		729 200 109	10	0.078	1 ¼	21	49	47
50		10		729 200 110	5	0.134	1 ½	26	61	57
63		10		729 200 111	5	0.255	2	34	76	72
75	2 ½	10	2 ½	729 200 112	6	0.404	2 ½	40	90	84
90		10		729 200 113	4	0.664	3	47	107	98
110		10		729 200 114	6	1.010	4	55	133	116
140	5	10	5	729 200 116	1	2.570	5	71	169	147
160		10		729 200 117	4	3.752	6	81	193	167
200		10		729 200 119	1	4.446	8	101	225	207
225		10		729 200 120	1	6.860	8	114	256	233

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>