




PROGEF Standard
Ventilating valve type 595
With fusion sockets metric

Model:

- Material: PP-H
- With protection cap up to DN50 made of PP-GF, DN65-100 made of POM
- Spring loaded, spring made of NIMONIC 90, HALAR coated
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Compact installation length

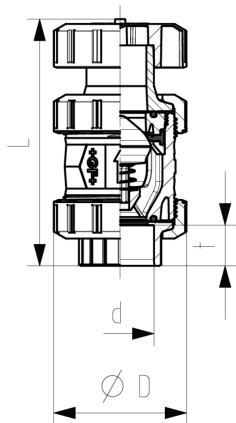

d	DN	PN	EPDM	FKM	D	L	t	closest
(mm)	(mm)	(bar)	Code	Code	(mm)	(mm)	(mm)	inch
16	10	10	167 595 001	167 595 011	50	126	14	3/8
20	15	10	167 595 002	167 595 012	50	127	15	1/2
25	20	10	167 595 003	167 595 013	58	142	16	3/4
32	25	10	167 595 004	167 595 014	68	153	18	1
40	32	10	167 595 005	167 595 015	84	171	19	1 1/4
50	40	10	167 595 006	167 595 016	97	190	21	1 1/2
63	50	10	167 595 007	167 595 017	124	219	28	2
75	65	10	167 595 008	167 595 018	166	256	29	2 1/2
90	80	10	167 595 009	167 595 019	200	275	33	3
110	100	10	167 595 010	167 595 020	238	318	39	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>