


COOL-FIT 2.0 Reducer

Model:

- Pre-insulated PE100 SDR11, metric
- Insulation made from GF HE foam
- Impact resistant. Color: black
- A: Electrofusion Fitting with integrated sealing lip, for a moisture-proof and vapour tight sealing
- B: Spigot Fitting with free end (separate electrofusion fitting needed for joining)

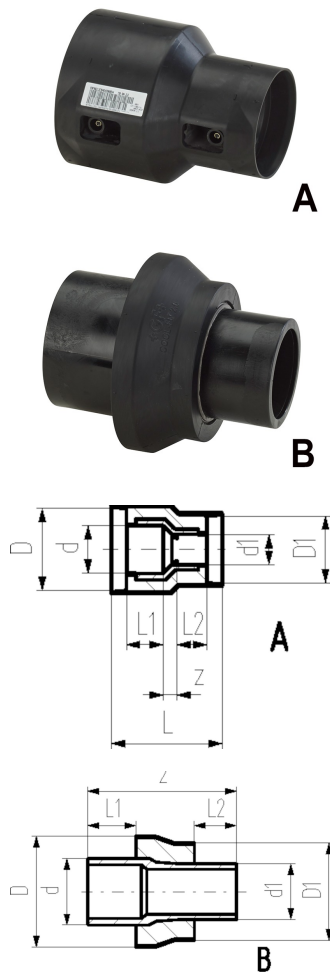

d	d1	D	D1	DN	SDR	PN	Code	Weight	L	L1	L2	z	Type
(mm)	(mm)	(mm)	(mm)	(mm)		(bar)		(kg)	(mm)	(mm)	(mm)	(mm)	
40	32	90	75	32	11	16	738 904 206	0.125	131	40	36	17	A
50	32	90	75	40	11	16	738 904 209	0.154	139	44	36	21	A
50	40	90	90	40	11	16	738 904 210	0.153	137	44	40	15	A
63	32	110	75	50	11	16	738 904 212	0.198	148	48	36	26	A
63	40	110	90	50	11	16	738 904 213	0.221	147	48	40	21	A
63	50	110	90	50	11	16	738 904 214	0.219	147	48	44	17	A
90	63	140	110	80	11	16	738 904 222	0.464	187	62	48	39	A
110	90	160	140	100	11	16	738 904 229	0.799	214	72	62	42	A
75	63	125	110	65	11	16	738 904 318	0.244		55	48	170	B
90	63	140	110	80	11	16	738 904 322	0.360		62	48	190	B
90	75	140	125	80	11	16	738 904 323	0.395		62	55	190	B
110	63	160	110	100	11	16	738 904 327	0.523		72	48	205	B
110	75	160	125	100	11	16	738 904 328	0.553		72	55	205	B
110	90	160	140	100	11	16	738 904 329	0.599		72	62	205	B
140	63	200	110	125	11	16	738 904 340	0.917		84	48	225	B
140	75	200	125	125	11	16	738 904 341	0.997		84	55	237	B
140	90	200	140	125	11	16	738 904 342	1.039		84	62	238	B
140	110	200	160	125	11	16	738 904 343	1.051		84	72	233	B

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>